


Note:

UL Style:AWM 20624, 20798 60V -40°C~+80°C.
 AWM 20706, 20861 60V -40°C~+105°C.
 AWM 2896, 30V -40°C~+80°C.

***RoHS Compliant**

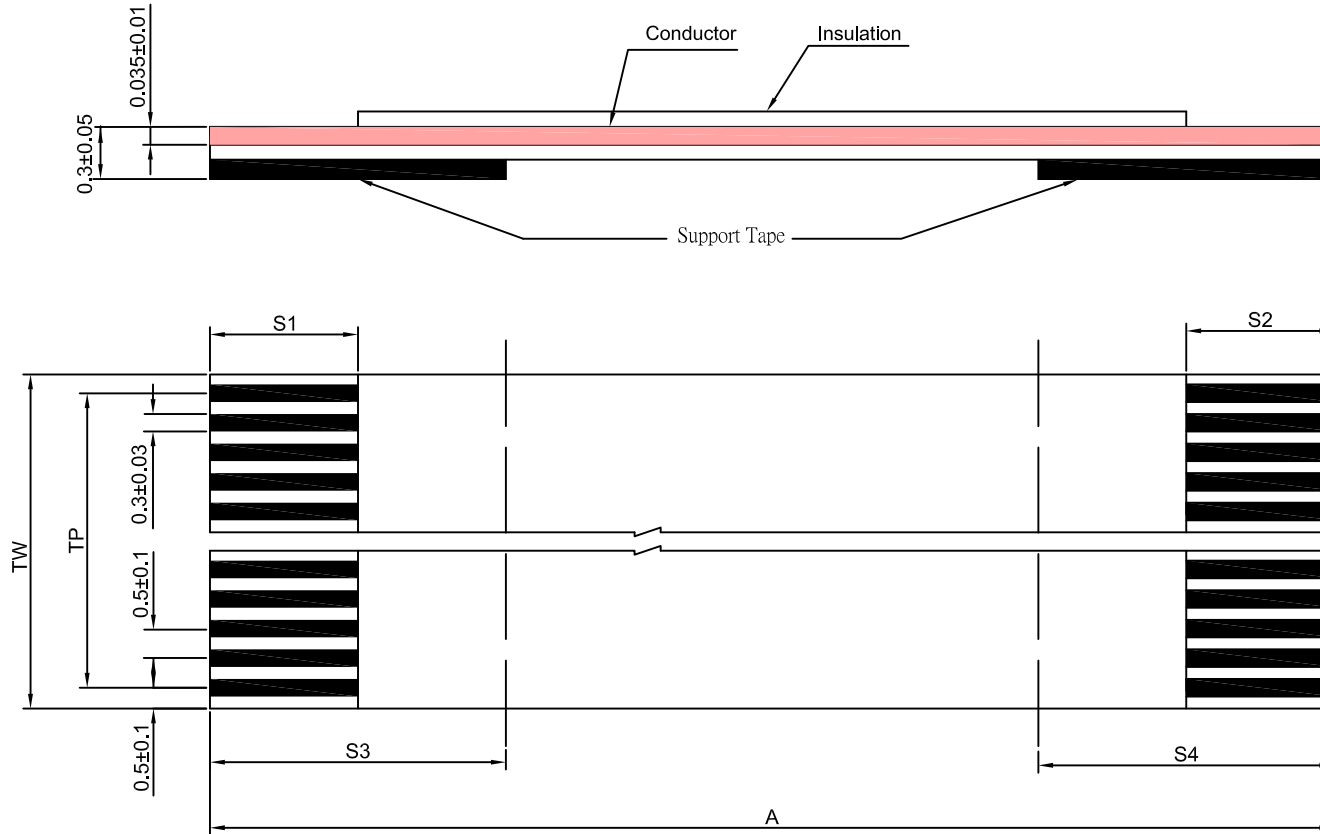

Series **FC5** x **-Bxx** 1 **C** 4 4 6 6 X **xxmm** Total Length

1: Pitch 0.5
 2: Pitch 1.0
 3: Pitch 1.25
 4: Pitch 2.54

No. of Pin Count
 0.5 Pitch For 4~80P.
 1.0 Pitch For 4~60P.
 1.25 Pitch For 2~46P.
 2.54 Pitch For 2~24P.

1:UL 20624
 2:UL 20706
 3:UL 20798
 4:UL 2896
 5:UL 20861

S4: 6.0mm(5mm To 10mm Increment 1.0mm)
 S3: 6.0mm(5mm To 10mm Increment 1.0mm)
 S2: 4.0mm(2mm To 5mm Increment 1.0mm)
 S1: 4.0mm(2mm To 5mm Increment 1.0mm)

A: A Type
 B: B Type
 C: C Type
 D: D Type

TYPE					
A					
B					
C					
D					
Code	SIZE	Tolerance	Code	SIZE	Tolerance
A	TOTAL LENGTH	±2(30~200) ±4(201~400) ±8(401~800) ±1%(801~)	S1	2.0-5.0	±0.5
			S2		
TW	0.5x(n+1)	±0.15	S3	5.0-10.0	±1.0
			S4		
TP	0.5x(n-1)	±0.15			

Tolerances x= ±0.5 .x= ±0.25 .xx=±0.15	Dwg. No.	FC51F00002		Part No.	FC5x-Bxx1C4466Xxxmm	
	Projection			Title:	Flexible Flat Cable	
	Unit mm	Scale	1:1	Drawn By	Kenny 11/15'16	
					①525	

OUPIN

OUPIN ENTERPRISE CO., LTD.

SHEET	1/1	Ver. No.	A4
-------	-----	----------	----