


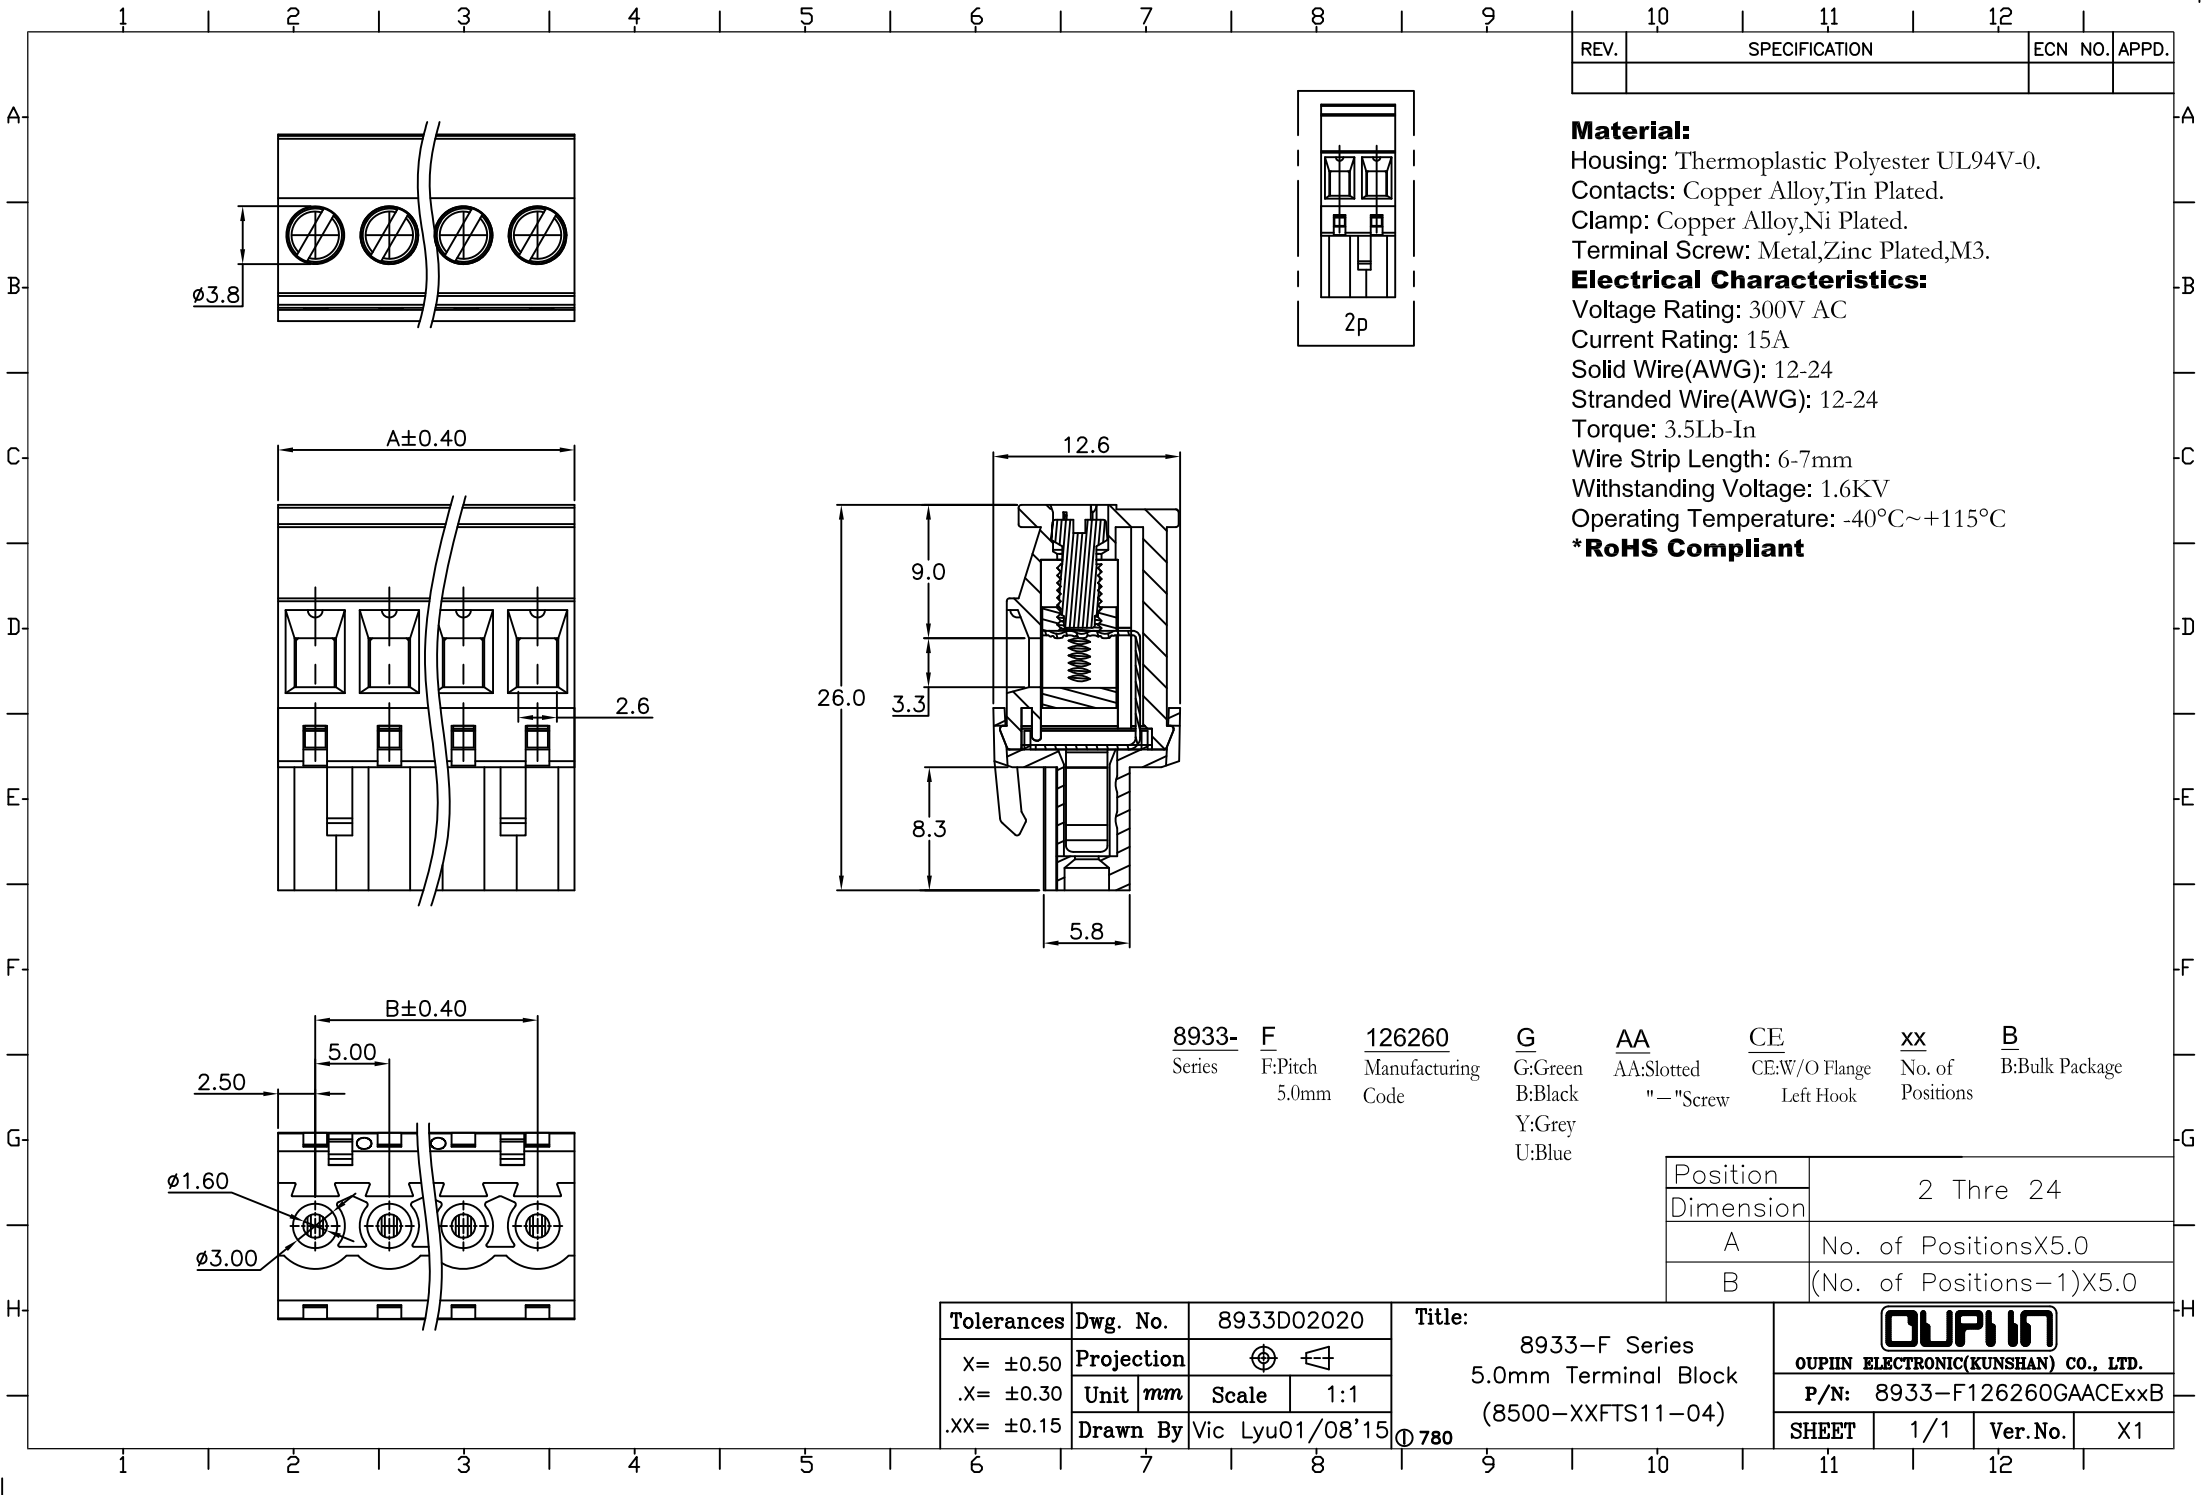

REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: Thermoplastic Polyester UL94V-0.
Contacts: Copper Alloy,Tin Plated.
Clamp: Copper Alloy,Ni Plated.
Terminal Screw: Metal,Zinc Plated,M3.
Electrical Characteristics:
Voltage Rating: 300V AC
Current Rating: 15A
Solid Wire(AWG): 12-24
Stranded Wire(AWG): 12-24
Torque: 3.5Lb-In
Wire Strip Length: 6-7mm
Withstanding Voltage: 1.6KV
Operating Temperature: -40°C~+115°C
***RoHS Compliant**

<u>8933-</u>	<u>F</u>	<u>126260</u>	<u>G</u>	<u>AA</u>	<u>CE</u>	<u>xx</u>	<u>B</u>
Series	F:Pitch 5.0mm	Manufacturing Code	G:Green B:Black Y:Grey U:Blue	AA:Slotted "—"Screw	CE:W/O Flange Left Hook	No. of Positions	B:Bulk Package

Position	2 Thre 24
Dimension	
A	No. of PositionsX5.0
B	(No. of Positions-1)X5.0

Tolerances	Dwg. No.	8933D02020		Title: 8933—F Series 5.0mm Terminal Block (8500—XXFTS11—04)	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
X= ±0.50	Projection				P/N: 8933—F126260GAACExxB				
.X= ±0.30	Unit	mm	Scale		1:1	SHEET	1/1	Ver.No.	X1
.XX= ±0.15	Drawn By	Vic Lyu01/08'15			Φ 780				

780