REV.	SPECIFICATION	ECN NO.	APPD.

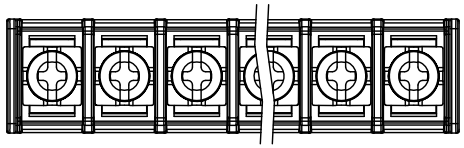

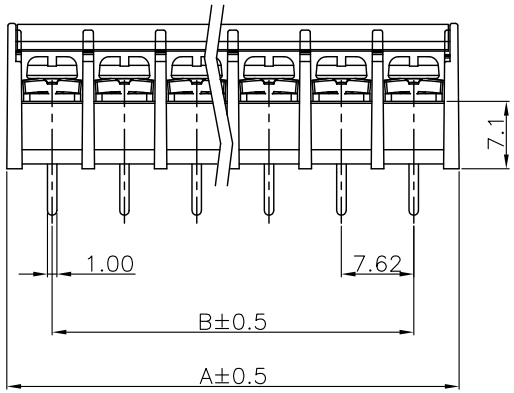

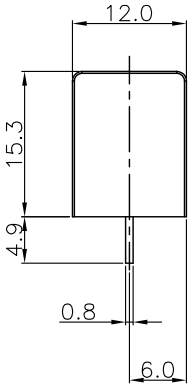

Material:
Housing: PA66,UL94V-0.
Solder Pin: Brass,Tin Plated.
Screw: Steel, Zinc Plated, M3.
Cover: PC.

Electrical Characteristics:
Current Rating: 15 A.
Voltage Rating: 300V.
Dielectric Withstanding Voltage: AC 2000V min.
Insulation Resistance: 1000MΩ min. at DC 500V.
Wire Range(AWG): 14-22 AWG.
Operating Temperature: -40°C~+115°C.
***RoHS Compliant**

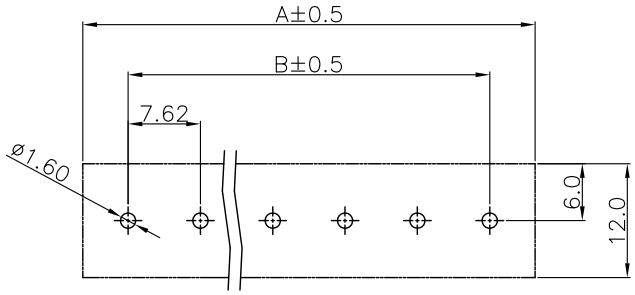

P.C.Board Layout

8936- J 120153 C 1 1 CD xx S B

- Series: 8936-
- J:Pitch 7.62mm: J
- Manufacturing Code: 120153
- C: With Cover / N: W/O Cover: C
- 1: Footprint 1: 1
- 1: Dip 4.9mm: 1
- CD: W/O Flange: CD
- No. of Positions: xx
- S: Straight: S
- B: Bulk Package: B

Position	02 Thru 20
Dimension	
A	(No. of Positions−1)X7.62+9.54
B	(No. of Positions−1)X7.62

Tolerances	Dwg No.	8936D02004	Title:	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
.x = ±0.50	Projection		8936 Series	P/N: 8936−J120153C11CDxxSB
.xx = ±0.25	Unit mm	Scale 1:1	7.62mm Terminal Block	SHEET 1/1 Ver.No. A2
.xxx = ±0.15	Drawn By	Vivian 08/23'17	①	