
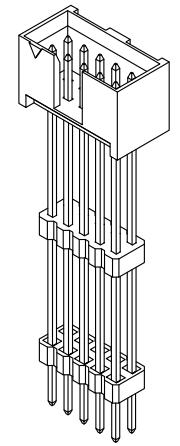


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN180303	





Material:

Housing: LCP, UL94V-0, Black.
 Contacts: Brass, Gold Plated on Contact Area and 80u" Min Tin Plated on solder tail over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 3 AMP at 80° ambient.
 Dielectric Withstanding Voltage: AC 500V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 250V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+125°C.


***RoHS Compliant**

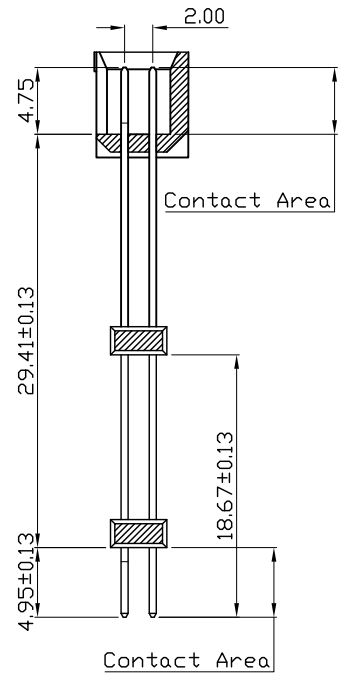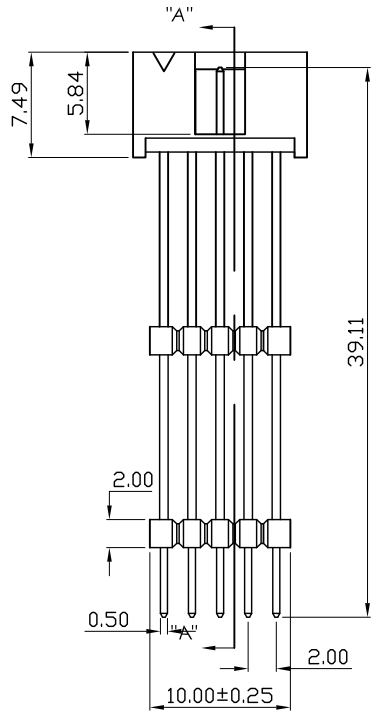

3112- 2 X 05 C 30 S U -A011

Series ———
 Double Row ———
 Position Per Row ———
 C: Selective Gold Plated ———
 00: G/F
 10: 10u"
 15: 15u"
 30: 30u"

Internal Code
 U: Tube Package
 S: Dip Type



P.C. Board Layout
 (Tolerance: ±0.05)

Tolerances	Dwg. No.	3112-D0000-011
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Polly 02/27'18

Title: 3112 Series
 Box Header Connector
 2.00(0.079") Pitch SMD Type

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 3112-2X05CxxSU-A011			
SHEET	1/1	Ver.No.	R3