

REV.	SPECIFICATION	ECN NO.	APPD.
X2			

Material and Plating:

Housing: LCP, UL94V-0 , Black.

Stopper: LCP, UL94V-0 , Black.

Power Contacts: High Conductivity Copper .

Au+Pd/Ni or Gold Plated on Contact Area and 80u" Tin Plated on Solder Tail over Nickel 50u".

Electrical Characteristics:

Current Rating: Power Pin 60 AMP.

Dielectric Withstanding Voltage: Power Pin :DC 1500V For 1 minute.

Insulator Resistance: 5000MΩ min.

Contact Resistance: Power Pin 0.3mΩ max.

Operating Temperature: -40°C ~+105°C .

*RoHS Compliant

Notes 1:

L: Low Power---PCB Mount 3.0mm Pitch




D: DC Power---PCB Mount 5.5mm Pitch

A: AC Power---PCB Mount 7.5mm Pitch

Notes 2:

P2,P4,P6 Without Power Contact .

All Power Contact Length is 8.0mm.

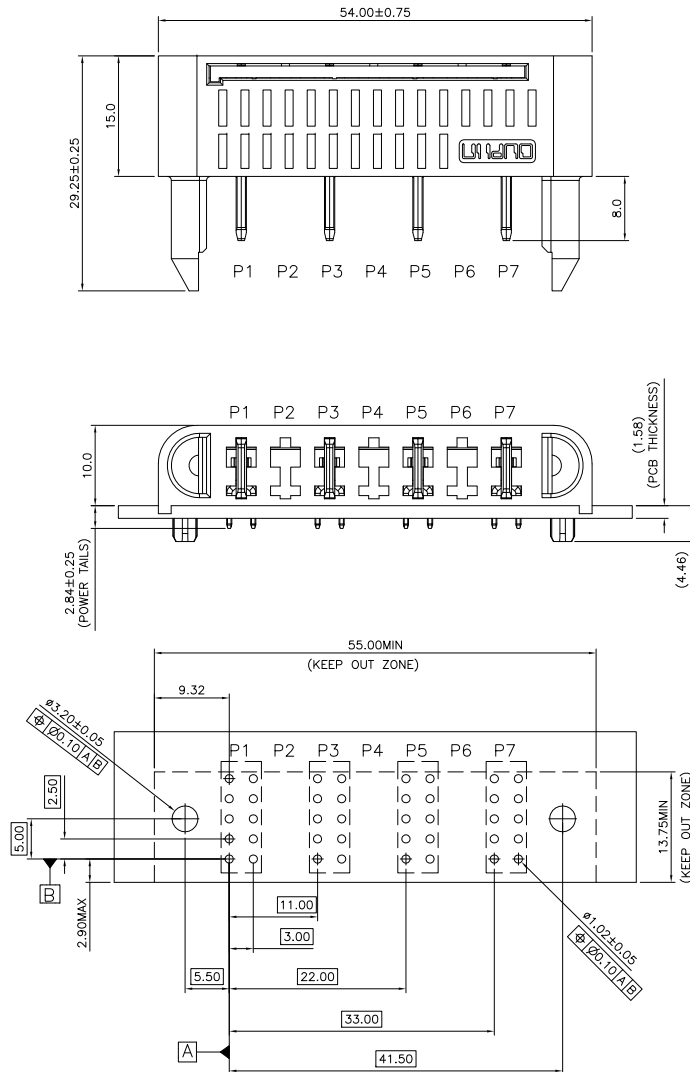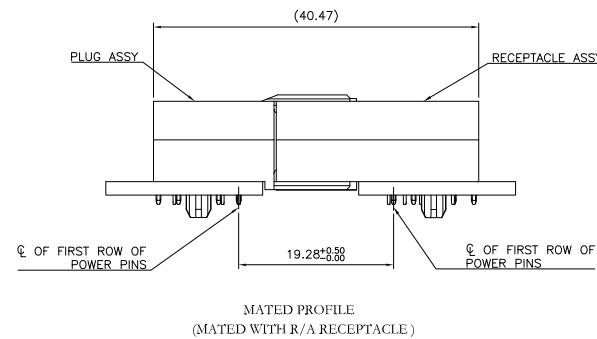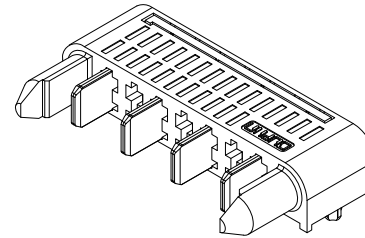

P.C.Board Layout
(Tolerance:±0.05)

PROPOSAL ONLY

Tolerances	Dwg. No.	9395-D0000-077	Title: 9395 Series Max P60 10mm Low Profile Plug, Right Angle,FMLB		OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9395-1D07B71DPG2A-A016			
x = ±0.5	Projection		Scale	1:1	SHEET	1/1	Ver. No.	X2
.x = ±0.25	Unit	mm	Drawn By	WP 06/05'23				
.xx = ±0.15								