





REV.	SPECIFICATION	ECN NO.	APPD.
X1			

Material and Plating:
Housing: LCP, UL94V-0 , BLACK.
Power Contacts: High Conductivity Copper .
Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min
Tin Plated on Solder Tail over Nickel 50u" Min .


Electrical Characteristics:
Current Rating: Power Pin 60 AMP.
Dielectric Withstanding Voltage: Power Pin :DC 1500V For 1 minute.
Insulator Resistance: 5000MΩ min.
Contact Resistance: Power Pin 0.3mΩ max.
Operating Temperature: -40°C ~+105°C .

***RoHS Compliant**

Notes 1:
L: Low Power---PCB Mount 3.0mm Pitch
D: DC Power---PCB Mount 5.5mm Pitch
A: AC Power---PCB Mount 7.5mm Pitch

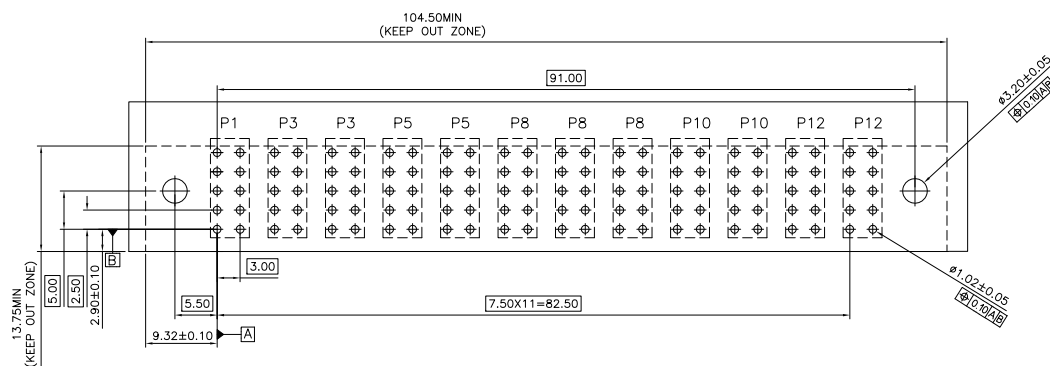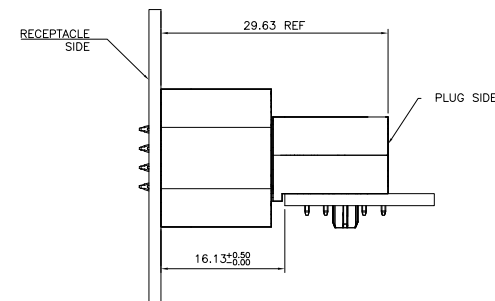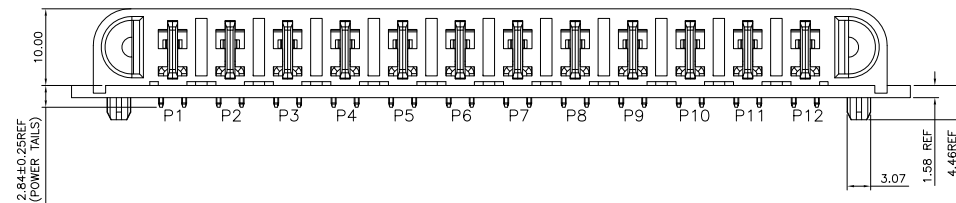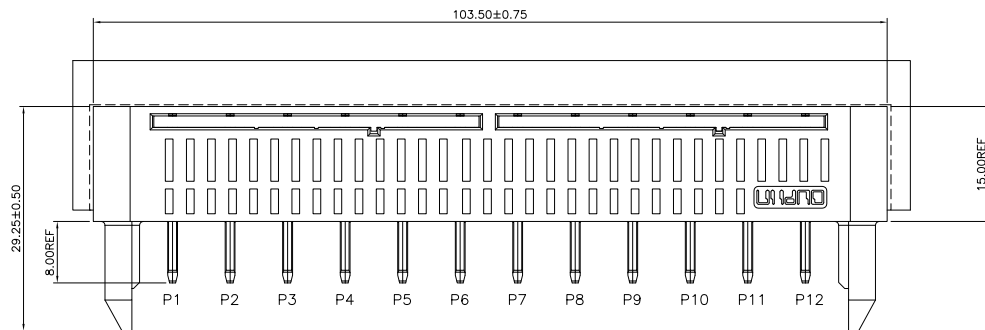

P.C.Board Layout
(Tolerance:±0.05)

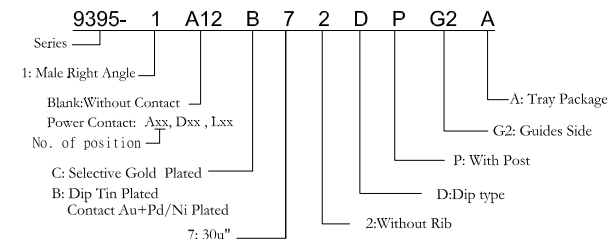

PROPOSAL ONLY

Tolerances	Dwg. No.	9395-D0000-064	Title: 9395 Series Max P60 10mm Low Profile, 60Amp Plug, Right Angle		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9395-1A12B72DPG2A			
x = ±0.5	Projection							
.x = ±0.25	Unit	mm	Scale	1:1				
.xx = ±0.15	Drawn By	WP 08/10'22						
					SHEET	1/1	Ver. No.	X1