
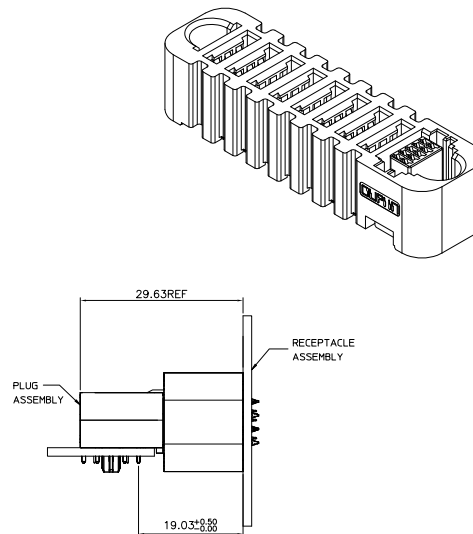
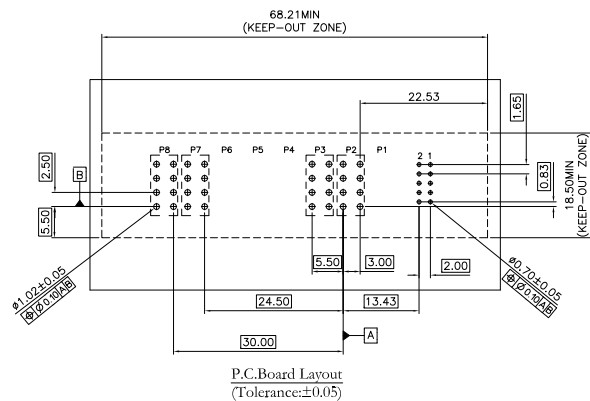

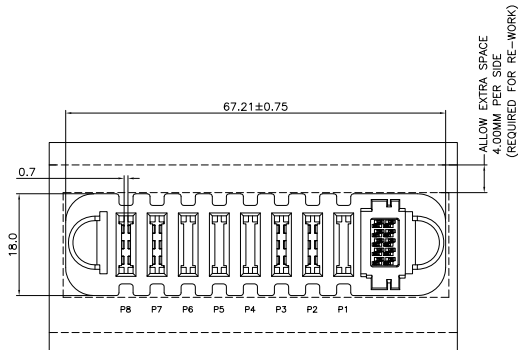


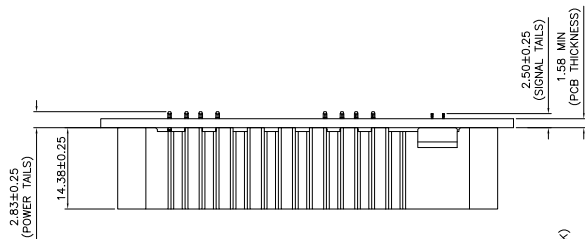

REV.	SPECIFICATION	ECN NO.	APPD.
X2			

Material and Plating:

Housing: LCP,UL94V-0, BLACK.

Power Contacts: High Conductivity Copper.

Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min Tin Plated on Press Fit over Nickel 50u" Min .

Signal Contact: Phosphor Bronze.

Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min Tin Plated on Press Fit over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: Signal Pin 2.5 A.

Power Pin 60 A.

Dielectric Withstanding Voltage: DC 1500V For 1 minute.

Insulator Resistance: 5000MΩ min.

Contact Resistance: Signal Pin 30mΩ max.

Power Pin 0.3mΩ max.

Operating Temperature: -40°C ~+105°C .

*RoHS Compliant

Notes 1:

L: Low Power---PCB Mount 3.0mm Pitch

D: DC Power---PCB Mount 5.5mm Pitch

A: AC Power---PCB Mount 7.5mm Pitch

Notes 2:

P1,P4,P5,P6 Without Contact.

9395- 2 D08 S10 B 7 1 P N G2 A -A003											
Series	2: Female Straight	Blank/Without Contact	Power Contact: Axx, Dxx , Lxx	No. of position	Blank/Without Contact	Signal Contact: S xx	No. of position	C: Selective Gold Plated	B: Dip Tin Plated	Contact Au+Pd/Ni Plated	Internal Code
											A: Tray Package
											G2: Guides Side
											N: Without Post
											P:Press Fit
											1:With Rib
											7: 30u"

PROPOSAL ONLY

Tolerances	Dwg. No.	9395-D0000-083		Title: 9395 Series Max P60 10mm Low Profile, 60Amp Receptacle, Straight	OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ±0.5	Projection				P/N: 9395-2D08S10B71PNG2A-A003			
.x = ±0.25	Unit	mm	Scale		1:1	SHEET		
.xx = ±0.15	Drawn By	WP 06/05'23			1/1			
					Ver. No.	X2		