

REV.	SPECIFICATION	ECN NO.	APPD.
R2	NEW	ECN230636	

Material and Plating:

Housing: LCP, UL94V-0 , Black.

Power Contacts: High Conductivity Copper.

30u"Au+Pd/Ni on contact Area and 80u"Min Tin
Plated on Press Fit over Nickel 50u"Min.

Electrical Characteristics:

Current Rating: Power Pin 30 AMP

Insulator Resistance: 5000MΩ min. at DC 500V.

Dielectric Withstanding Voltage:

Power Pin DC 1500V For 1 minute.





Contact Resistance: Power Pin 20mΩ max. at DC 20mA.

Operating Temperature: -40°C ~+105°C .

*RoHS Compliant

Notes:

Mate with: Edge Card Thickness 1.57mm.

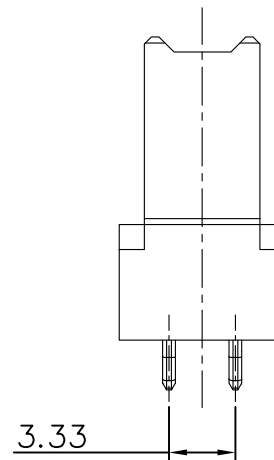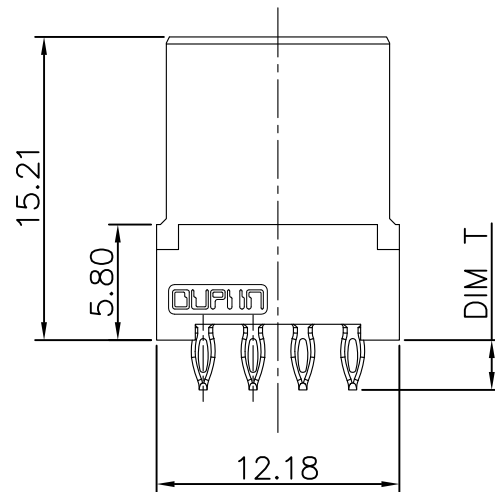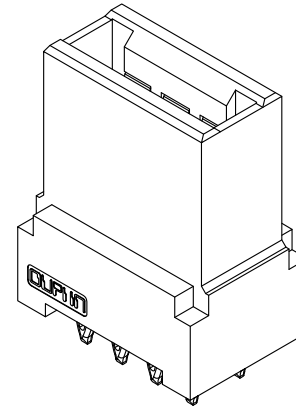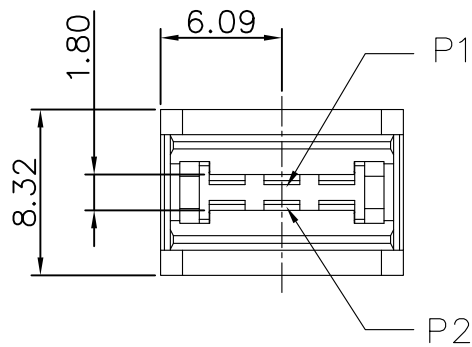

9392- 2 S P02 N 1 1 CB 30 P A
 Series ———
 2:Female Straight ———
 S:With Slot ———
 Blank:W/O Slot ———
 P02:Power Contact ———
 N:W/O Post ———
 1: Without Guides ———
 A:Tray Package ———
 P:Press-Fit Type ———
 30: 30 u" ———
 CB: Dip Tin Plated ———
 Contact Au+Pd/Ni Plated ———
 1:DIM T=2.5mm. ———

Tolerances	Dwg. No.	9392-D0000-026
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	JCQ 06/27'23

Title:

9392 Series
Low Profile Hybrid
Power Receptacle



OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N:9392-2SP02N11CB30PA

SHEET	1/2	Ver. No.	R2
-------	-----	----------	----

