

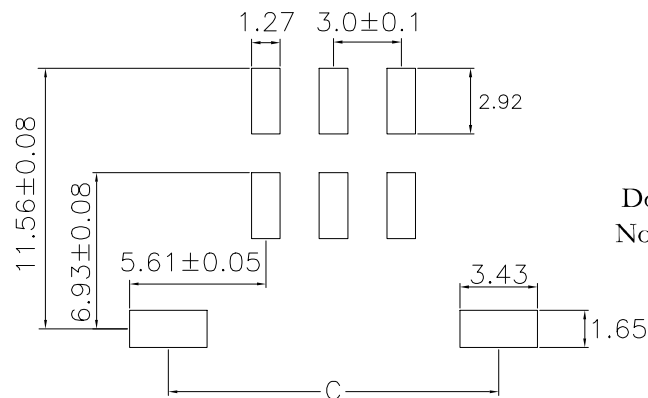
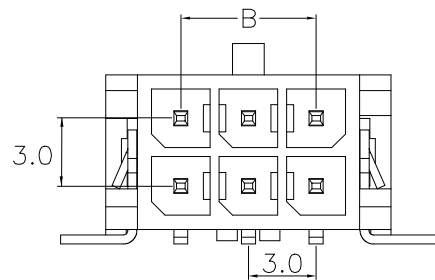


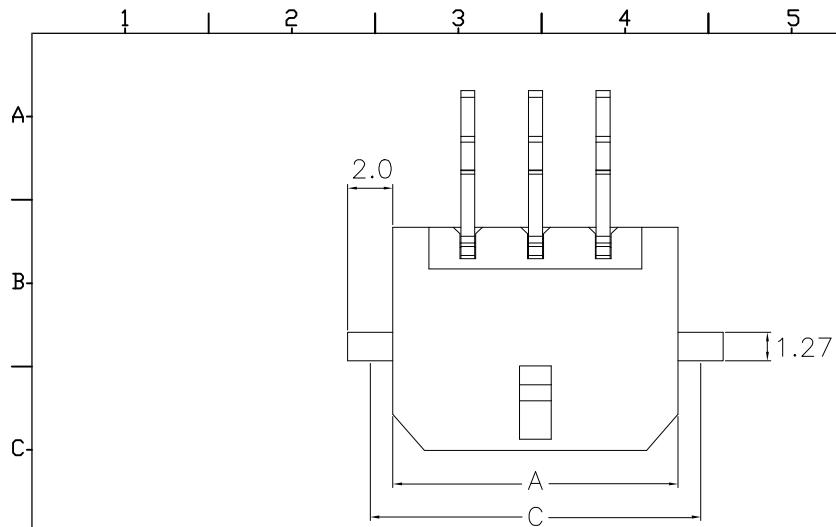

P. C. Board Layout

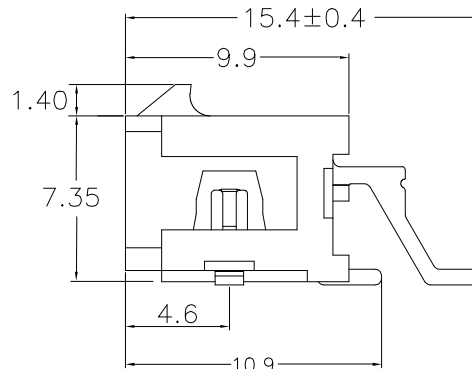

4976- 2 X xx T D 1 T'
 Series Double Row No. of Pin Per Row T: Tin Plated D: SMD Type 1: Right Angle T: Tape & Reel Package

Material:

Housing: LCP, UL94V-0.

Contact: Brass. 100u" Tin Plated over Nickel 30u".

Electrical Characteristics:

Current Rating: 5.0 AMP

Voltage Rating: 250V DC/AC RMS.

Dielectric Withstanding Voltage: 1500V AC.

Insulator Resistance: 10mΩ max.

Contact Resistance: 1000MΩ min.

Operating Temperature: -25°C ~+85°C.

***RoHS Compliant**

Dimension			
Positions	A	B	C
2X01	6.65		8.65
2X02	9.65	3.00	11.65
2X03	12.65	6.00	14.65
2X04	15.65	9.00	17.65
2X05	18.65	12.00	20.65
2X06	21.65	15.00	23.65
2X07	24.65	18.00	26.65
2X08	27.65	21.00	29.65
2X09	30.65	24.00	32.65
2X10	33.65	27.00	35.65
2X11	36.65	30.00	38.65
2X12	39.65	33.00	41.65

Tolerances	Dwg. No.	4976D01008	
x = ±0.5	Projection		
.x = ±0.25	Unit mm	Scale	1:1
.xx = ±0.15	Drawn By	Martin 06/18'25	

Title: 4976 Series
 3.0mm Wafer SMD
 Right Angle

Φ667

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4976-2XxxTD1T			
SHEET	1/1	Ver.No.	B7