

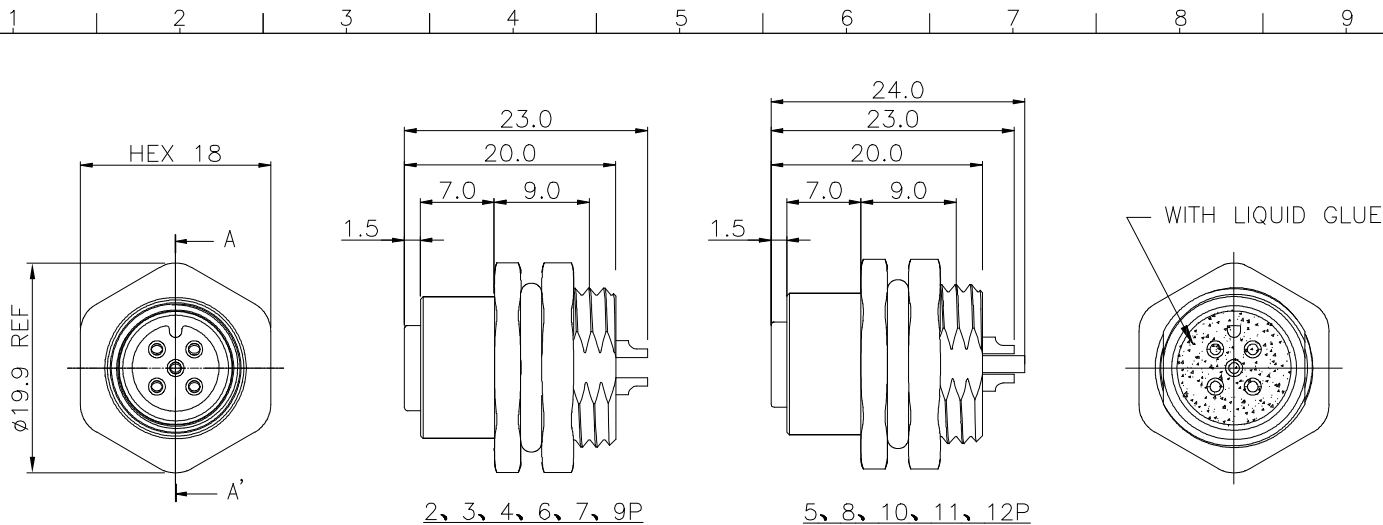



PG9 Recommended
Panel CUT-Out
Thickness 4.0 Max.



M16 Recommended
Panel CUT-Out
Thickness 4.0 Max.



Section A-A'



Series 8926- M12 xx F G 00 x E RA xx A

A: Tray Package

Panel Lock Thread:
01:PG9
02:M16

RA: Rear Fastened

E: Solder Cup

A:A Code
D:D Code

F: Female

G:Gold Plated

00:Gold Flash

Pin Assignments Front View

A Code						
	2Pin	3Pin	4Pin	5Pin	6Pin	7Pin
D Code						
	8Pin	9Pin	10Pin	11Pin	12Pin	

Tolerances	Dwg. No.	S2620250429-02
.x = ±0.30	Projection	
.xx = ±0.20	Unit	mm
	Scale	1:N
	Drawn By	Martin 04/29'25

Title: 8926 Series
M12 Waterproof Connector
Female Solder Cup Type

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8926-M12xxFG00xERAxXA			
SHEET	1/1	Ver.No.	X1