


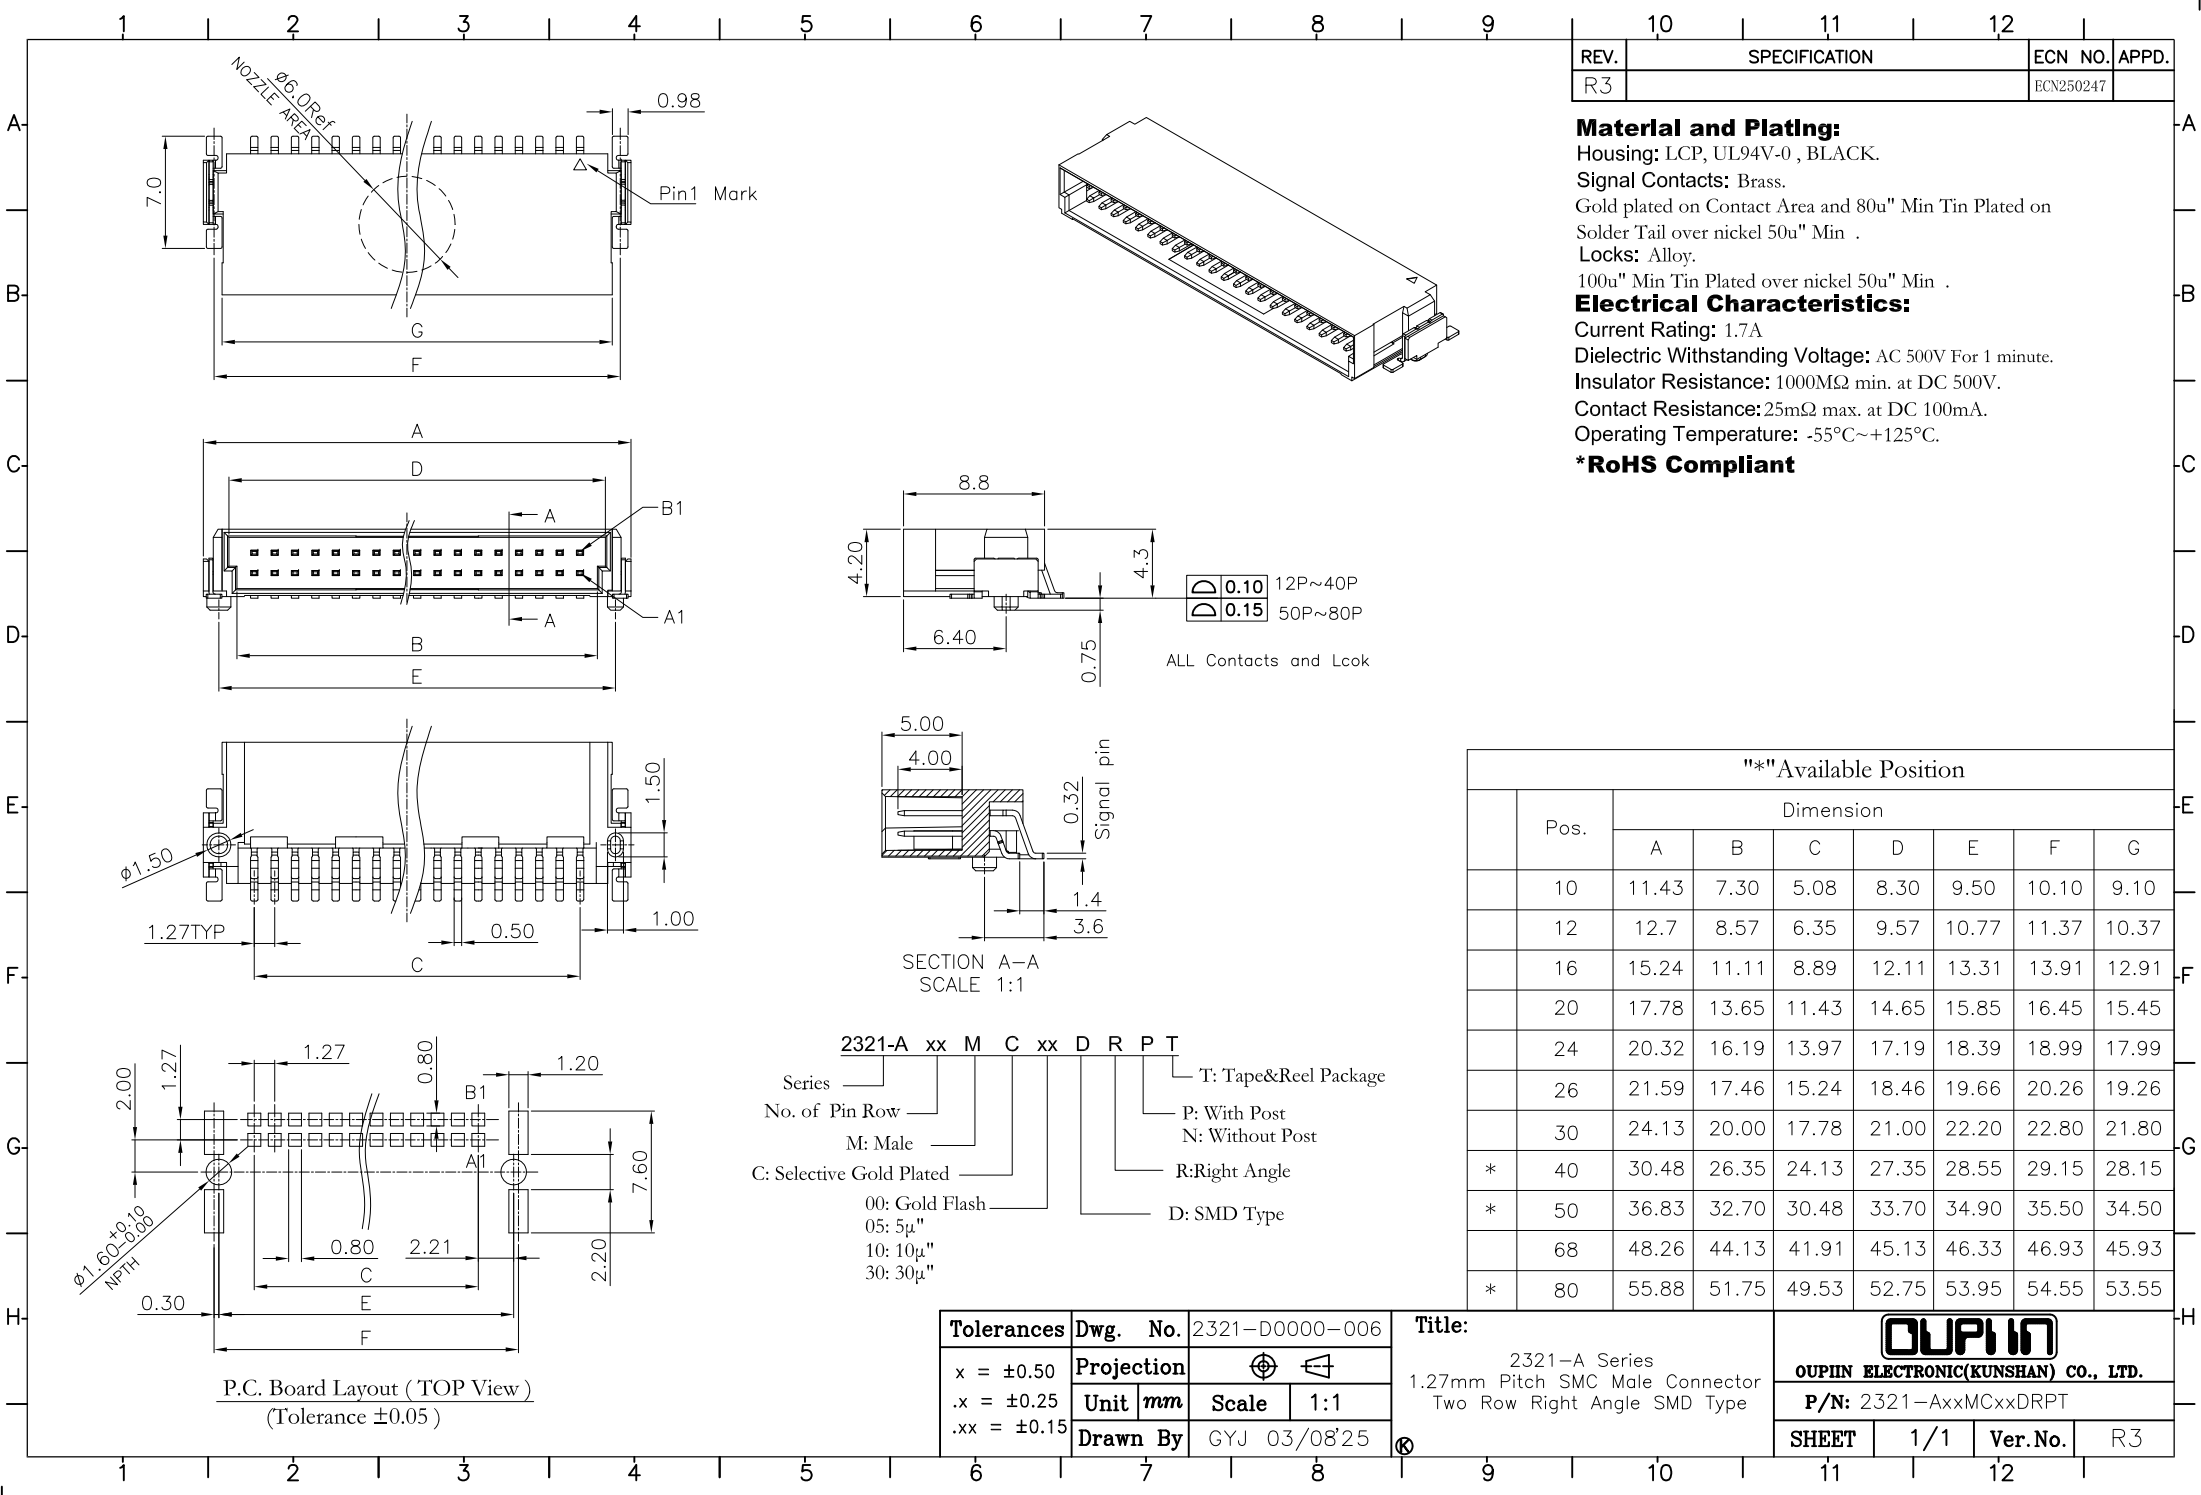

REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN250247	

Material and Plating:

Housing: LCP, UL94V-0 , BLACK.

Signal Contacts: Brass.

Gold plated on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .

Locks: Alloy.

100u" Min Tin Plated over nickel 50u" Min .

Electrical Characteristics:

Current Rating: 1.7A

Dielectric Withstanding Voltage: AC 500V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 25mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

"*"Available Position								
	Pos.	Dimension						
		A	B	C	D	E	F	G
	10	11.43	7.30	5.08	8.30	9.50	10.10	9.10
	12	12.7	8.57	6.35	9.57	10.77	11.37	10.37
	16	15.24	11.11	8.89	12.11	13.31	13.91	12.91
	20	17.78	13.65	11.43	14.65	15.85	16.45	15.45
	24	20.32	16.19	13.97	17.19	18.39	18.99	17.99
	26	21.59	17.46	15.24	18.46	19.66	20.26	19.26
	30	24.13	20.00	17.78	21.00	22.20	22.80	21.80
*	40	30.48	26.35	24.13	27.35	28.55	29.15	28.15
*	50	36.83	32.70	30.48	33.70	34.90	35.50	34.50
	68	48.26	44.13	41.91	45.13	46.33	46.93	45.93
*	80	55.88	51.75	49.53	52.75	53.95	54.55	53.55

2321-A xx M C xx D R P T
Series _____ T: Tape&Reel Package
No. of Pin Row _____ P: With Post
M: Male N: Without Post
C: Selective Gold Plated R: Right Angle
00: Gold Flash D: SMD Type
05: 5μ"
10: 10μ"
30: 30μ"

Tolerances	Dwg. No.	2321-D0000-006	
x = ±0.50	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	GYJ 03/08'25	

Title: 2321-A Series
1.27mm Pitch SMC Male Connector
Two Row Right Angle SMD Type

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2321-AxxMCxxDRPT			
SHEET	1/1	Ver.No.	R3