


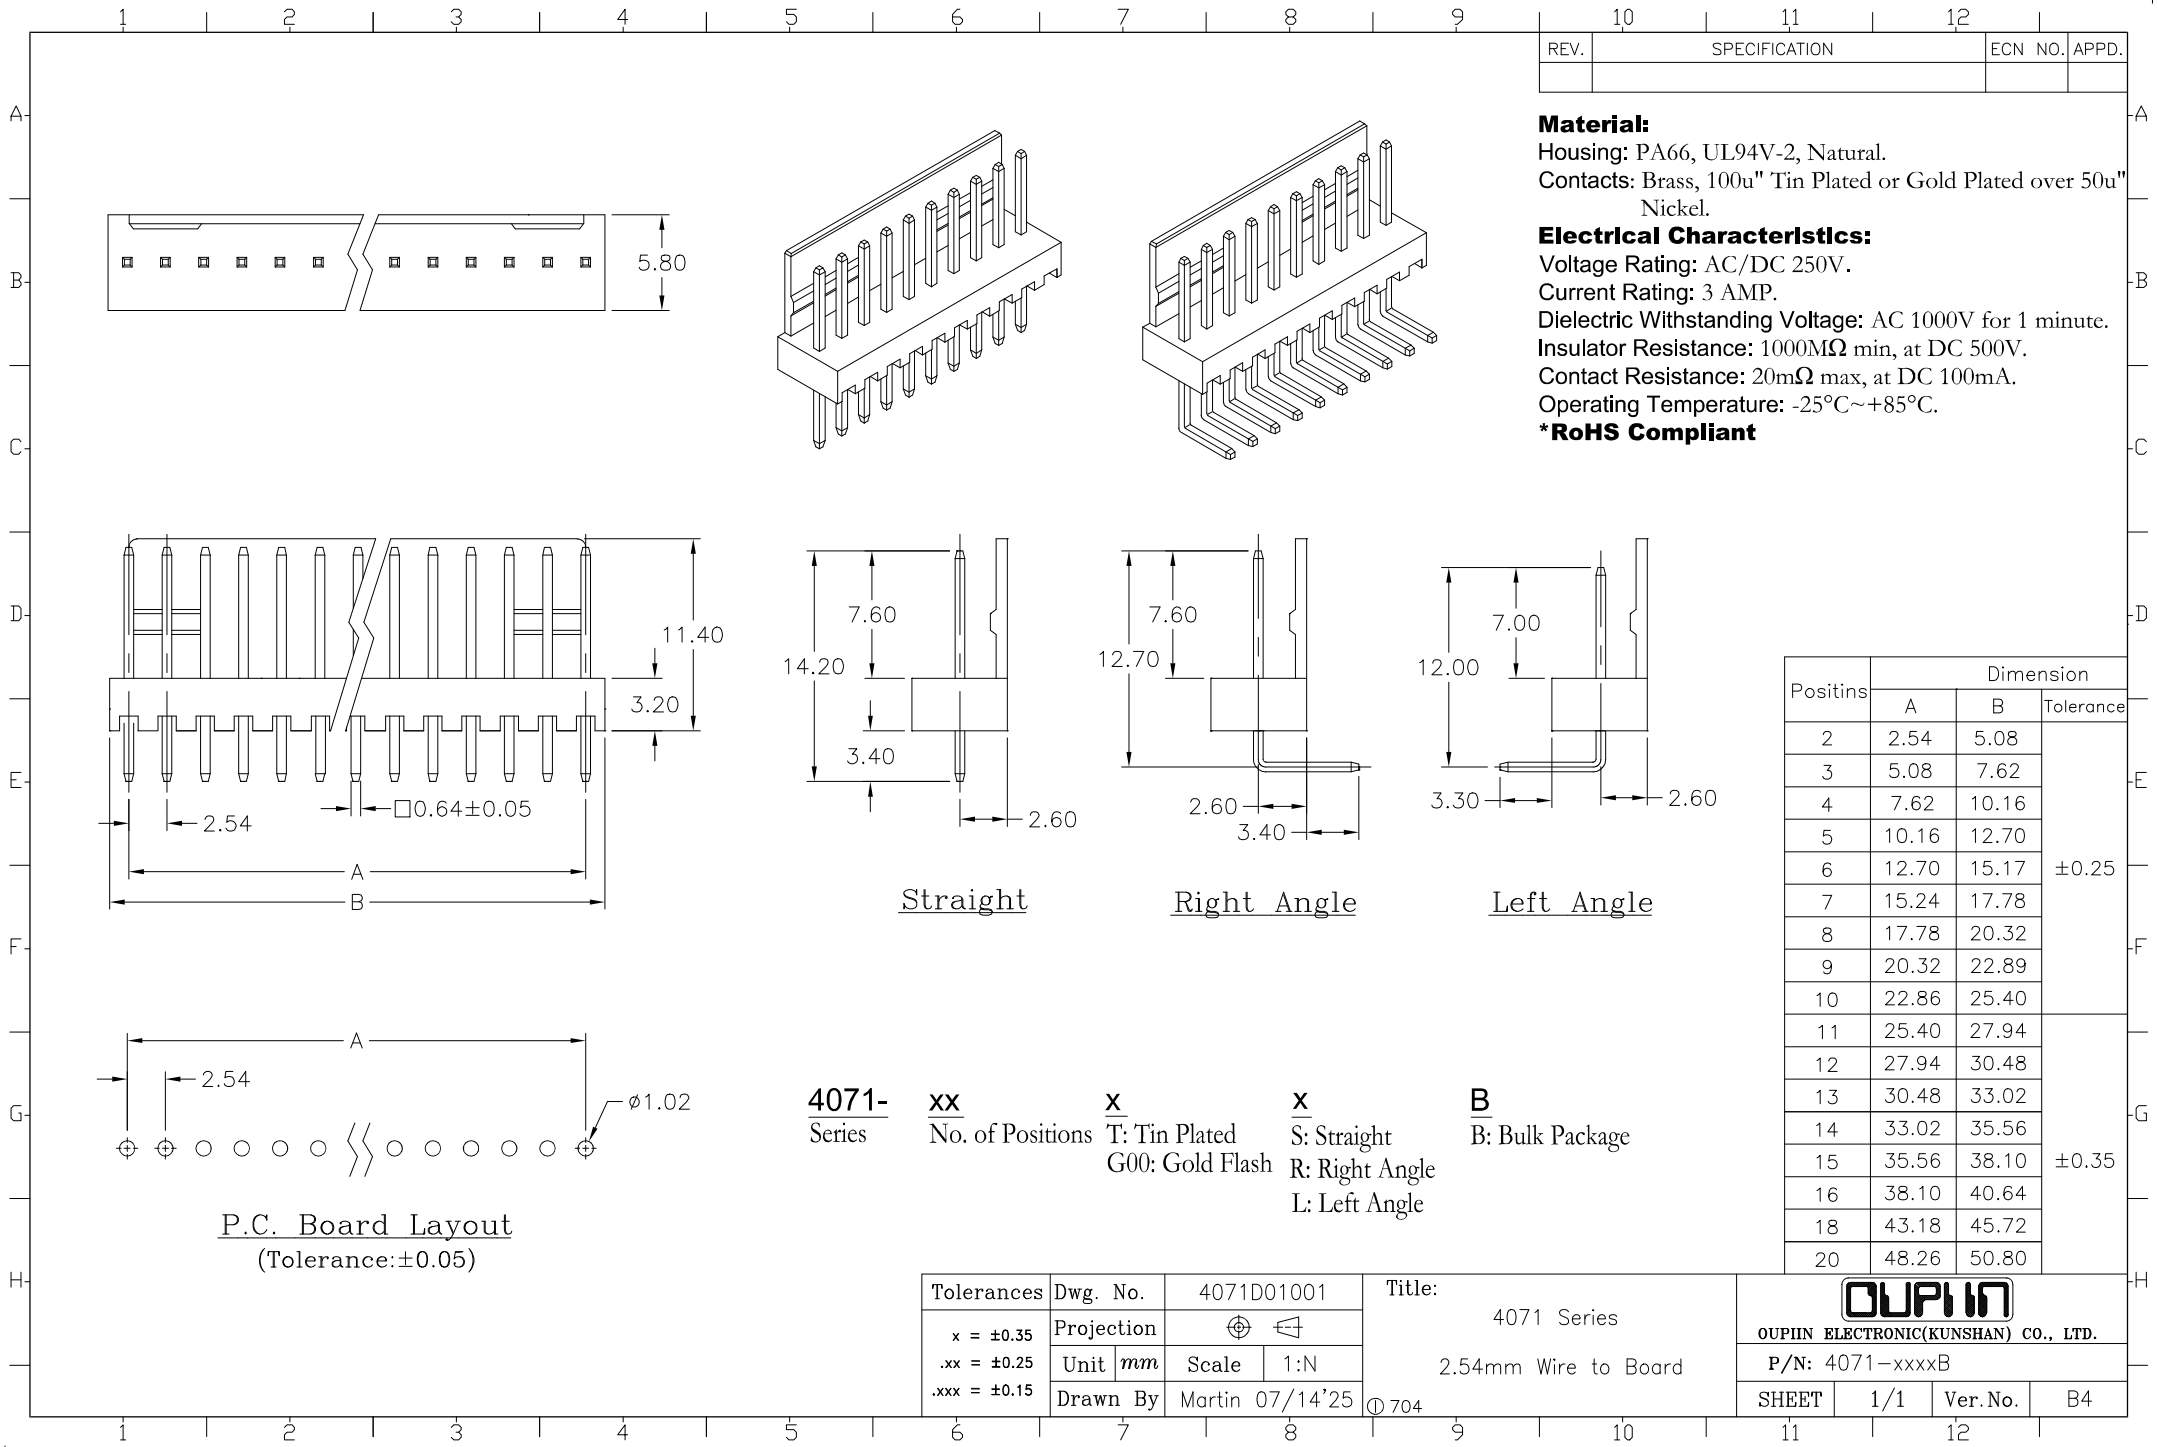

REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA66, UL94V-2, Natural.
Contacts: Brass, 100u" Tin Plated or Gold Plated over 50u" Nickel.

Electrical Characteristics:
Voltage Rating: AC/DC 250V.
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulator Resistance: 1000M Ω min, at DC 500V.
Contact Resistance: 20m Ω max, at DC 100mA.
Operating Temperature: -25°C~+85°C.
***RoHS Compliant**

Positins	Dimension		Tolerance
	A	B	
2	2.54	5.08	±0.25
3	5.08	7.62	
4	7.62	10.16	
5	10.16	12.70	
6	12.70	15.17	
7	15.24	17.78	
8	17.78	20.32	
9	20.32	22.89	
10	22.86	25.40	±0.35
11	25.40	27.94	
12	27.94	30.48	
13	30.48	33.02	
14	33.02	35.56	
15	35.56	38.10	
16	38.10	40.64	
18	43.18	45.72	
20	48.26	50.80	

4071- Series **xx** No. of Positions **X** T: Tin Plated **X** S: Straight **B** B: Bulk Package
G00: Gold Flash R: Right Angle L: Left Angle

Tolerances	Dwg. No.	4071D01001		Title: 4071 Series 2.54mm Wire to Board	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
x = ±0.35	Projection				P/N: 4071-xxxxB				
.xx = ±0.25	Unit	mm	Scale		1:N	SHEET	1/1	Ver.No.	B4
.xxx = ±0.15	Drawn By	Martin 07/14'25			① 704				