





REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN250638	

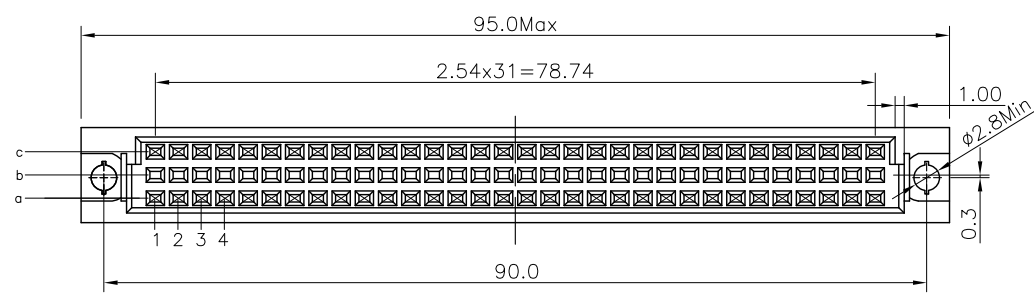

Material and Plating:
Housing: PBT,UL94V-0,Beige.
Contacts: Copper Alloy.
Cover: PBT,UL94V-0,Beige.
Gold Plated on contact Area and Wire Cutting Area over Nickel 50u" Min.

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000M min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

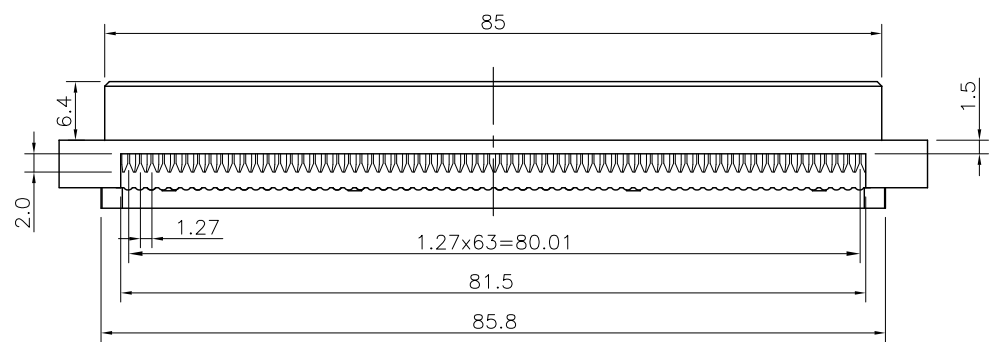

9001- 1 2 64 IDC xx A
Series
1: 3Row Insulators For 1.27 Cable
2:Female
Position
A: Tray Package
00: G/F
10:10u"
15:15u"
30:30u"

Tolerances	Dwg. No.	9001D12002	Title:		
x = ±0.50	Projection		9001 Series		OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
.x = ±0.25	Unit	mm	Scale	1:1	P/N: 9001-1264IDCxxA
.xx = ±0.15	Drawn By	XM 06/18'25	DIN41612 IDC Type 3 Rows Female		SHEET 1/1 Ver.No. R7