

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN230742	

Material and Plating:

Housing: LCP, UL94V-0 , Black.

Power Contacts: High Conductivity Copper.

30u"Au+Pd/Ni on Contact Area and 80u" Min Tin

Plated on Press Fit over Nickel 50u" Min .

Signal Contacts : Phosphor Bronze.

30u"Au+Pd/Ni on Contact Area and 80u" Min Tin

Plated on Press Fit over nickel 50u" Min .

Electrical Characteristics:

Current Rating: Signal Pin 1.0 AMP.

Power Pin 45 AMP.(UL)

Insulator Resistance: Signal:5000M Ω min. at DC 500V.

Power:5000MΩ min. at DC 500V.

Dielectric Withstanding Voltage:

Signal Pin DC 1500V For 1 minute.






Power Pin DC 1500V For 1 minute.

Contact Resistance: Signal Pin 20mΩ max.

Power Pin 20mΩ max.

Operating Temperature: -40°C ~+105°C .

***RoHS Compliant**

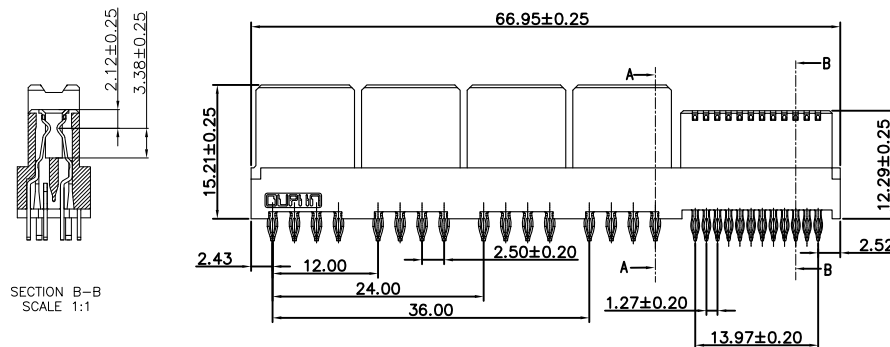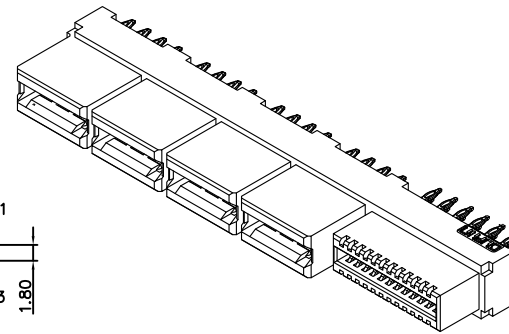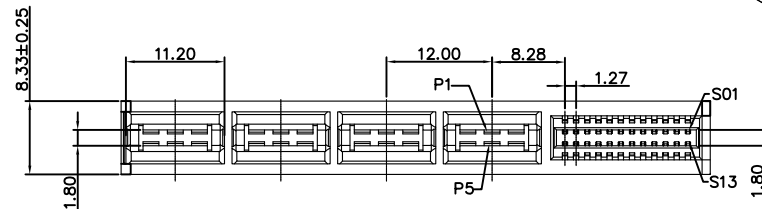

Series — 9392- 2 S P08 S24 N 1 1 CB 30 P A

2:Female Straight —

S:With Slot
Blank:W/O Slot

P08:Power Contact

S24:Signal Pin

N:W/O Post
P:With Post

1: Without Guides

A:Tray Package

P:Press Fit Type

30: 30 u"

CB: Dip Tin Plated
Contact Au+Pd/Ni Plated

1: Dim T=2.50mm
2: Dim T=2.90mm
3: Dim T=4.50mm

Tolerances	Dwg. No.		9392-D0000-068	
$x = \pm 0.5$	Projection			
$.x = \pm 0.25$	Unit	<i>mm</i>	Scale	1:1
$.xx = \pm 0.15$	Drawn By		XM 07/15'25	

Title:

9392 Series
Low Profile Hybrid
Power Receptacle







OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 9392-2SP08S24N11CB30PA

SHEET	1/2	Ver. No.	R7
-------	-----	----------	----

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN250742	

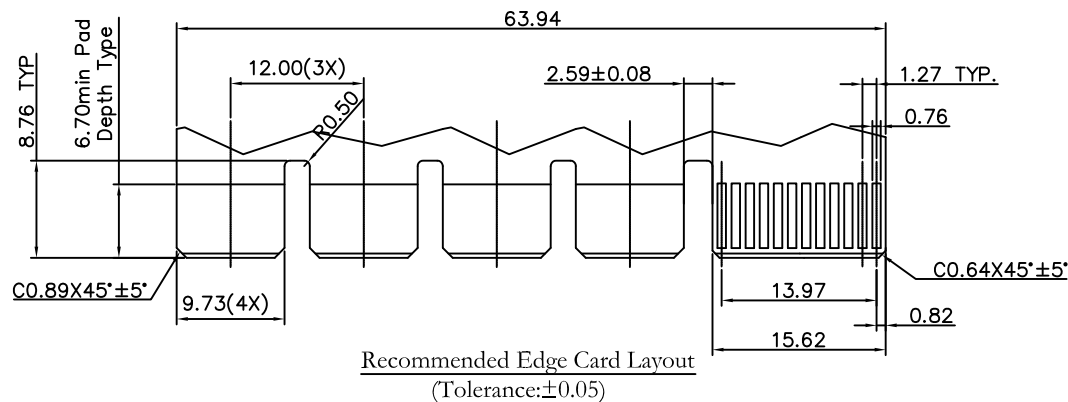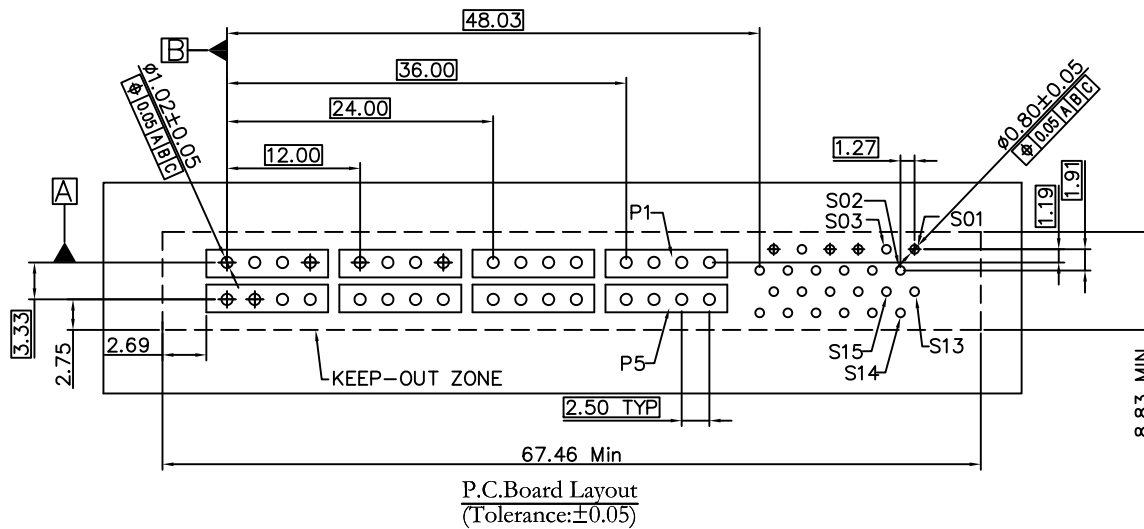

Tolerances	Dwg. No.	9392-D0000-068
x = ± 0.5	Projection	$\oplus$ $\triangleleft$
.x = ± 0.25	Unit	mm
.xx = ± 0.15	Scale	1:1
	Drawn By	XM 07/15'25

Title:

9392 Series
Low Profile Hybrid
Power Receptacle

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9392-2SP08S24N11CB30PA			
SHEET	2/2	Ver. No.	R7