

REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN250813	

Material and Plating:




Housing: LCP UL94V-0 , Black
Contacts: High Conductivity Copper.
80u" Min Bright Tin Plated over nickel 50u" Min.

Electrical Characteristics:


Current Rating: 300A
Dielectric Withstanding Voltage:
DC 1500V For 1 minute.
Insulator Resistance:
1500MΩ min. at DC 500V.

Contact Resistance: 0.7mΩ Max
Operating Temperature: -40°C~+105°C

***RoHS Compliant**

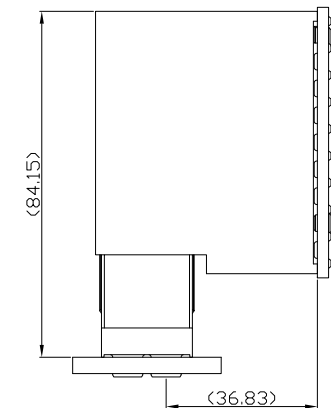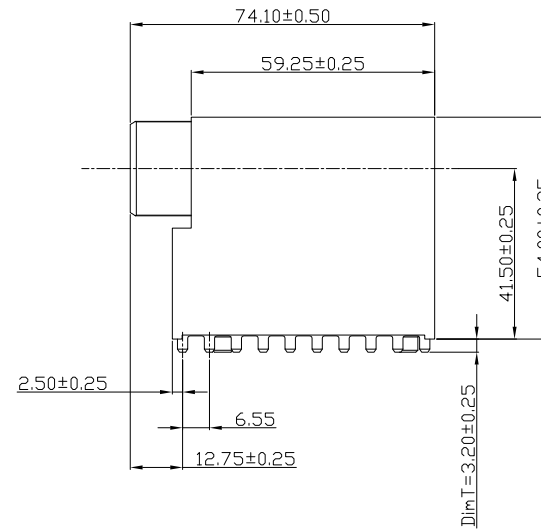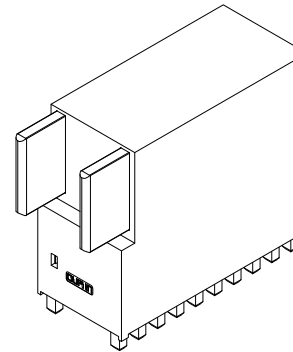

MATED PROFILE

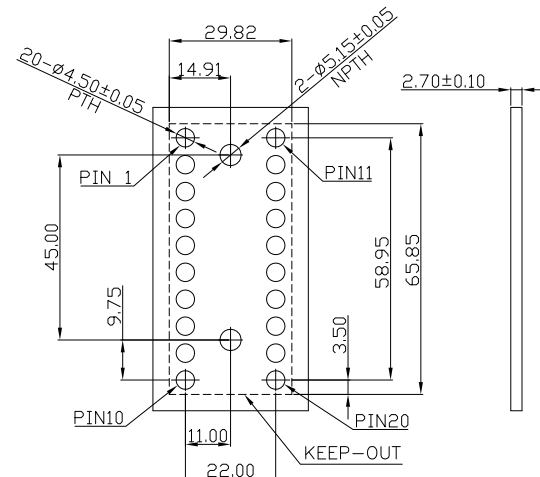

P.C. Board Layout(Top View)
(Tolerance:±0.05)

9192-B 1 P02 T S A A01
Series 1:Male Right-angle P02: P02 T:Tin Plated S:Dip Type A01: With Post,Dim T=3.20mm A:Tray Package

Tolerances	Dwg No.	9192-DP02-062
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	WP 08/07'25

Title:

9192-B Series
Male Power 300A Connector

OUPIN

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.

P/N: 9192-B1P02TSA01

SHEET	1/1	Ver.No.	R3
-------	-----	---------	----