

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

☒ CONFIDENTIAL ☐ TOP SECRET

SPEC.NO.(規範編號)	Q9312BOM-2353									PAGE	1/4	REV.	A
APPLICABLE CUSTOMER (適用客戶)	ALL	APPLICABLE PRODUCT (適用產品)	9312-3P02B7WBA01							PACKAGING CATEGORY (包裝方式)		PE BAG PACKING	

REVISION HISTORY (修訂履歷)

ECN REV. NO	PAGE (頁次)									
	1	2	3	4						
A	New (新版)									

DIVISION (事業單位)	Product Development (產品開發課)	APPROVED (核准)		CHECKED (審核)		PREPARED (制表)	XS 11/23'25
-----------------	-----------------------------	---------------	--	--------------	--	---------------	-------------

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

SPEC.NO.(規範編號) Q9312BOM-2353

☒ CONFIDENTIAL ☐ TOP SECRET	
PAGE	2/4
REV.	A

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)


REMARK (備 注)

一.Packing Mode: (包裝方式)




(1).PE bag 140*200 (T=0.9) , CT-0paper bag, drying agent.
(PE袋 140*200 (T=0.9) , CT-0紙盒,干燥劑)

(2).Put every 1 piece of product into a PE bag (140 * 200), pinch the bag tightly, and put 24 pieces of product into one inner box. Then put the desiccant into the box.

每1PCS 产品放入一只PE袋 (140*200)中,再把袋口捏紧,一个内箱装24pcs 产品,然后将干燥劑放入盒子中.

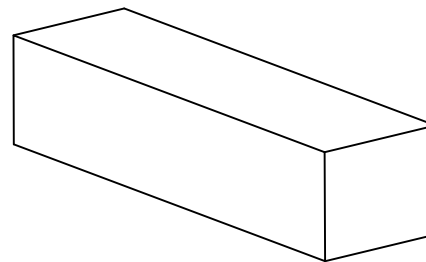

CT-0:Filed with 9312-3P02B7WBA01 24PCS

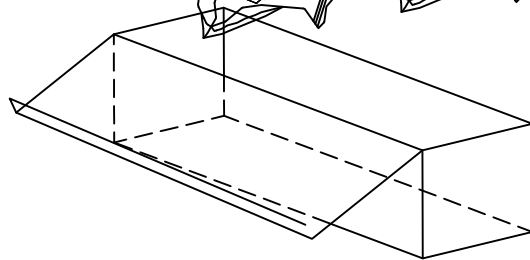

Paper Box : CT-0
(紙箱 : CT-0)



PE 140*200

歐品電子(昆山)有限公司

OUPIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)


SPEC.NO.(規範編號) Q9312BOM-2353

☒ CONFIDENTIAL ☐ TOP SECRET

PAGE 3/4 REV. A

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)


REMARK (備注)

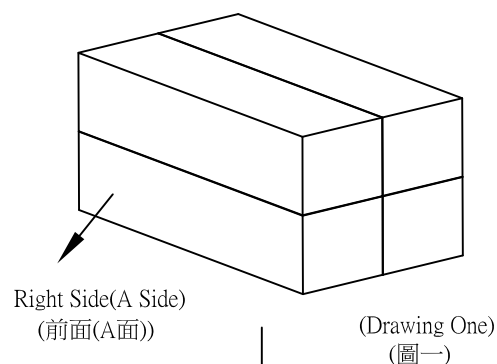


Inner Box 4PCS
(內盒4PCS)

CT-0
(Specification:460*130*105)
(規格:460*130*105)

Laying Deriction:Put A Side at the Front
(放置方向:A面朝前)

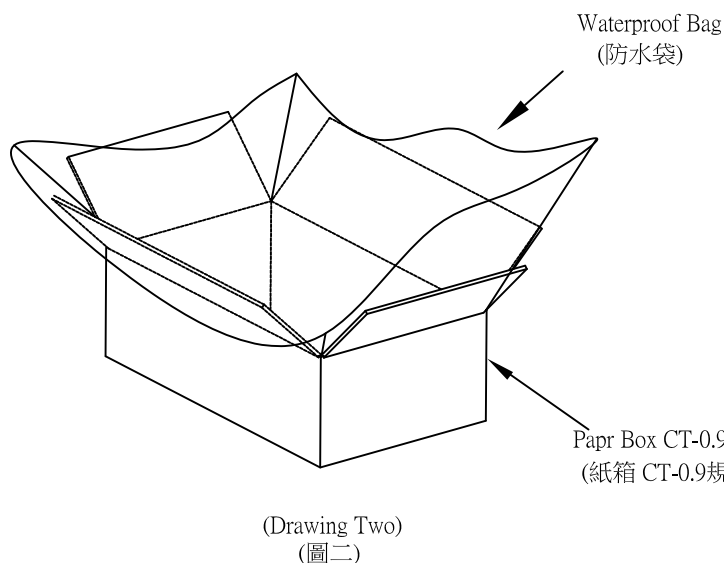

Paprr Box CT-0.9 Specification:475*275*225
(紙箱 CT-0.9規格:475*275*225)



二.Outer box packing mode: (外箱包裝方式)

- (1).Paper box CT-0.9 Standart 1 PCS.
(紙箱CT-0.9規格 1 PCS.)
- (2).Put waterproof bag 1 PCS in the paper box.
(紙箱內側放入防水袋 1 PCS.)
- (3).Put 4PCS inner box filled with product in the waterproof bag.
(于防水袋內放入4PCS裝滿產品之內盒.)
- (4).Laying mode of the four inner boxes is that A side in front side.,
the laying mode of the four inner boxes must in one direction.
(四個內盒的放置方式為1面朝前放置,四內盒放置方向須一致.)
- (5).The detailed specification of inner box is shown in page two.
(內盒之詳細包裝規範如第2頁.)
- (6).After laying inner boxes, tie the waterproof bag tightly.Seal the
surface of the outer box.(Drawing Three)
(放好內盒,扎緊防水袋。將外箱上層封口.(圖三))

The form on the right and flank side of the bo must be filled correctly
and clearly, take actural testing weight as the standard of every box
gross weight.
(外箱之正麥和側麥所要填寫之項目要填寫正確,清晰,每箱之
毛重應以實測重量為準.)

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

歐品電子(昆山)有限公司

OUPHIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

								☒ CONFIDENTIAL ☐ TOP SECRET			
SPEC.NO.(規範編號)		Q9312SPP-2353						PAGE:	4/4	REV.	A
PACKING MATERIAL (包裝材料)			PRODUCT P/N		PACKING N.W.		PACKING QUANTITY (包裝數量)			WEIGHT (重量) kg	
MATERIAL NAME (材料名稱)		PART NO. (料號)	Q'TY	(產品料號)	(包材重量)	PCS/CT-0 BOX	CT-0 BOX/BOX	PCS/BOX	N.W./PCS	N.W./BOX	G.W./BOX
PAPER BOXES (紙箱)		CT-0.9	1	9312-3P02B7WBA01	3.92	24	4	96	0.086	8.26	12.68
INNER PAPER BOXES (內紙箱)		CT-0	4								
WATERPROOF BAG (防水袋)		100*70	1								
DRYING AGENT (干燥劑)		-----	4								
PE PACKING BAG (PE包裝袋)		140*200	96								
1.NOTE: (注意) When the finished products have been made,take the actual weight as the standard of gross weight in each box. (成品出貨時,每箱之毛重應以實測重量為準) When the finished products have been made,stick the proper designation list on the box according to product demand. (成品出貨時,依據出貨要求貼上相對應的標籤單)											