

REV.	SPECIFICATION	ECN NO.	APPD.
R9		ECN280105	

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 500V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.



Operating Temperature: -65°C~+125°C .

***RoHS Compliant**







Insertion Depth: 2.20mm to 4.35mm.

Bottom Entry Insertion Depth: 4.40mm min.
(Excluding PCB Thickness).

Options

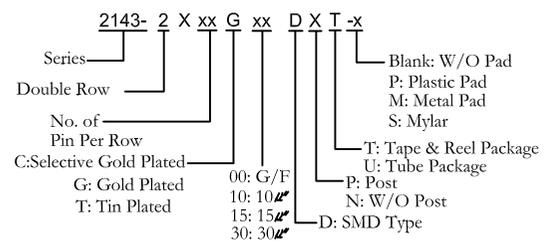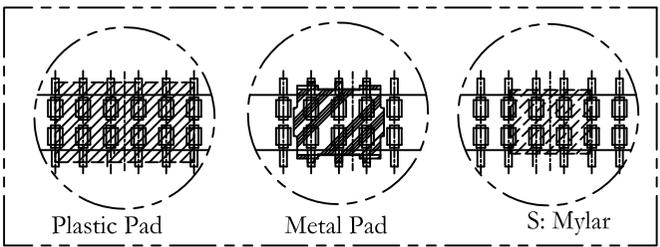

Position	
Dimension	4 Thru 80
A	2.0 X No. of Positions/2
B	2.0 X No. of Positions/2 -2.0
C	2.0 X No. of Positions/2 -4.0

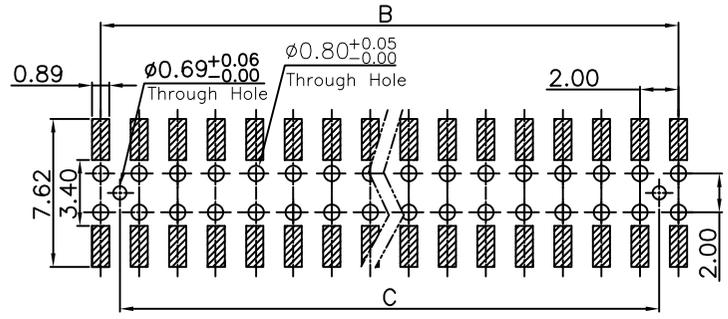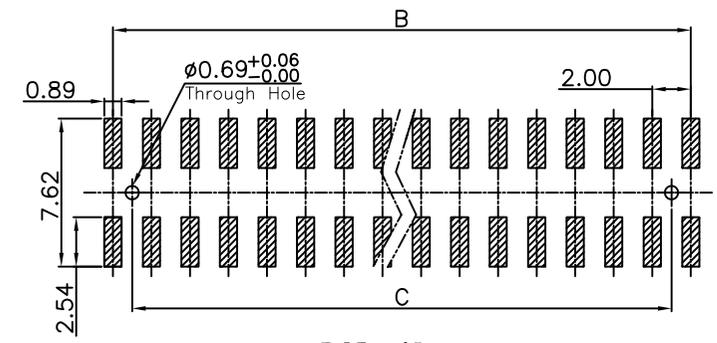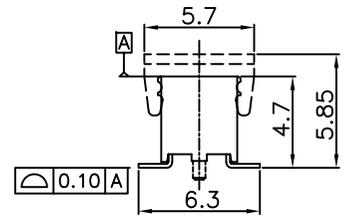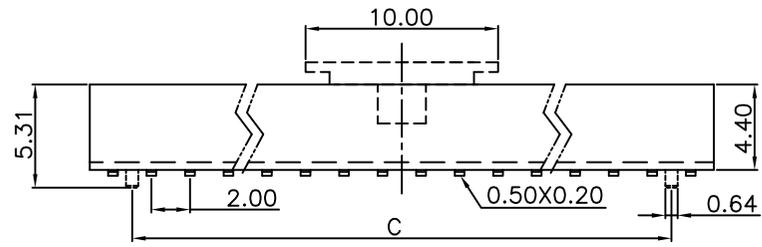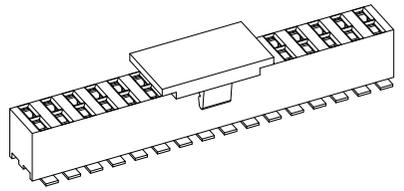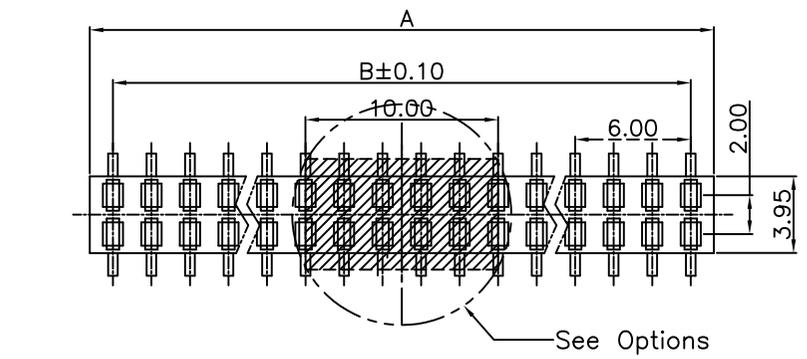

Tolerances	Dwg. No.	2143D02006	Title:	
x = ±0.5	Projection		2143 Series	
.x = ±0.25	Unit	mm	P.C.B. Socket	
.xx = ±0.15	Scale	1:1	2.0mmX2.0mm	
	Drawn By	CCH1/3/26		

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 2143-2XxxGxxDXT-x
SHEET 1/1 Ver.No. R9