

Materials:

Cover: Thermoplastic.

PCB: FR-4.

Pull Latch - Thermoplastic(Color Black)

Weave: Plastic Braid Sleeve PET.


Cable: Twinax Cable.

IMPEDANCE:

85 Ohm and 100 Ohm Impedance are Optional.


This Product Used SAS 3.0/4.0**Test Conditions:**

1. 100% Open & Short & Miss-Wiring & Intermittence Test.
2. Conductive Resistance: 3Ω Max.
3. Insulation Resistance: 100 MΩ.
4. Hi-POT Test: 300VDC For 10ms.
5. This Product Meets SAS3.0.

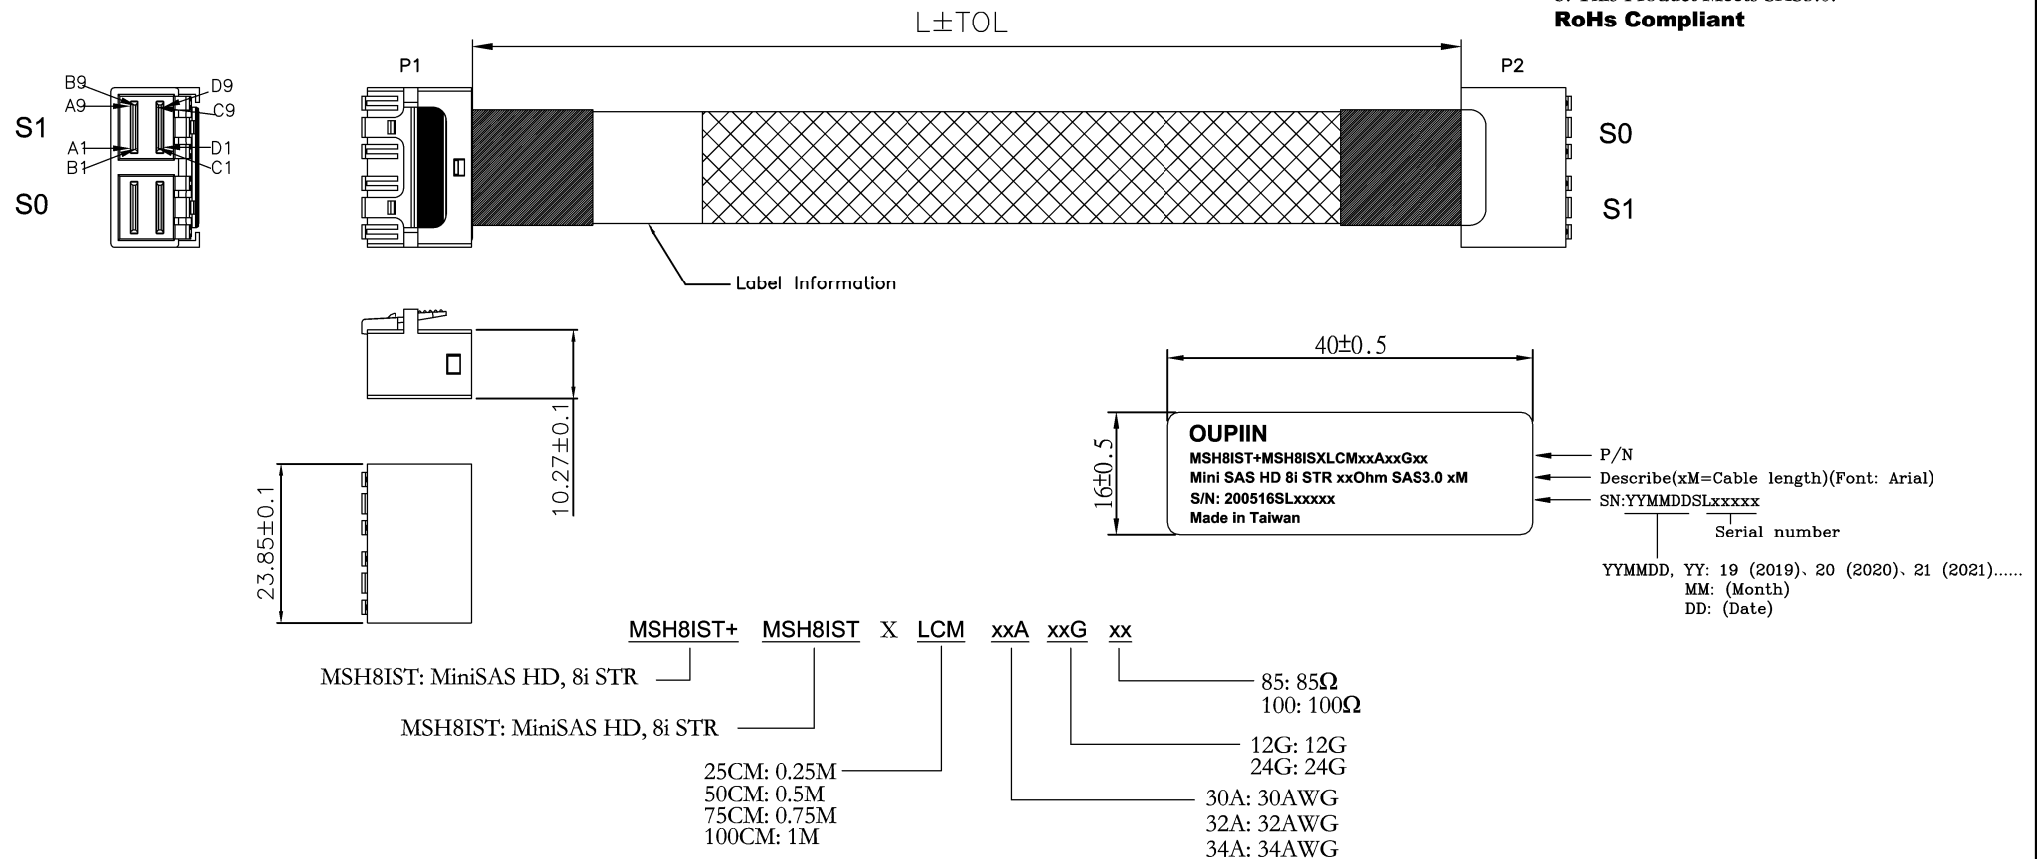RoHs Compliant

Tolerances(Cable Total Length)	Drawn No.	S2220200407-05		Part No.		 OUPIIN ENTERPRISE CO., LTD.			
± 5 (0~500mm)	Projection			MSH8IST+MSH8ISTXLCMxxAxxGxx					
± 10 (501~1000mm)	Unit mm	Scale	1:N		Title:	Mini SAS HD 8i, STR to STR, Cable Assembly, SAS 3.0			
± 20 (1001~2000mm)	Drawn By	Jerry 06/16'20		① 679					
± 40 (2001mm~xxxx)									
						SHEET	1/2	Ver. No.	X2

WIRING TABLE

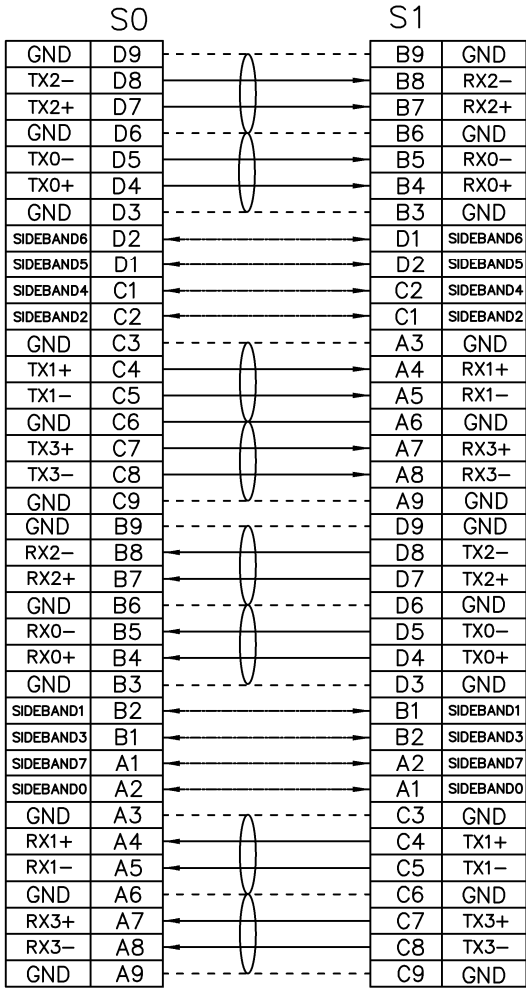

Tolerances(Cable Total Length)	Drawn No.	S2220200407-05		Part No.	 OUPIIN ENTERPRISE CO., LTD.			
± 5 (0~500mm)	Projection			MSH8IST+MSH8ISTXLCMxxAxxGxx				
± 10 (501~1000mm)	Unit mm	Scale	1:N	Title:				
± 20 (1001~2000mm)	Drawn By	Jerry 06/16'20		Mini SAS HD 8i, STR to STR, Cable Assembly, SAS 3.0				
± 40 (2001mm~xxxx)				① 679				
					SHEET	2/2	Ver. No.	X2