


REV.	SPECIFICATION	ECN NO.	APPD.
R15		ECN260625	

Material and Plating:
Housing: LCP, UL94V-0 , Black.
Power Contacts: High Conductivity Copper.
Signal Contacts : Phosphor Bronze.
Au+Pd/Ni or Gold Plated on Contact Area and 80u" Min Tin Plated on solder tail or Press Fit over Nickel 50u" .


Electrical Characteristics:
Current Rating: Signal Pin 1.0 A. Power Pin 45 AMP.(UL)
Insulator Resistance: 5000MΩ min. at DC 500V.
Dielectric Withstanding Voltage:
Signal Pin DC 1500V For 1 minute.
Power Pin DC 1500V For 1 minute.
Contact Resistance: Signal Pin 20mΩ max. at DC 20mA.
Power Pin 20mΩ max. at DC 20mA.
Operating Temperature: -40℃ ~+105℃ .

***RoHS & HF Compliant**





Notes:
Mate with: Edge Card Thickness 1.57mm.




Press Fit Type




Dip Type

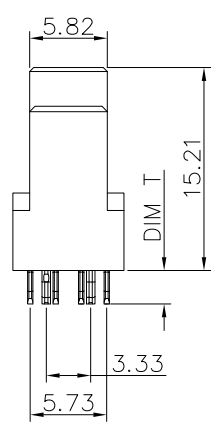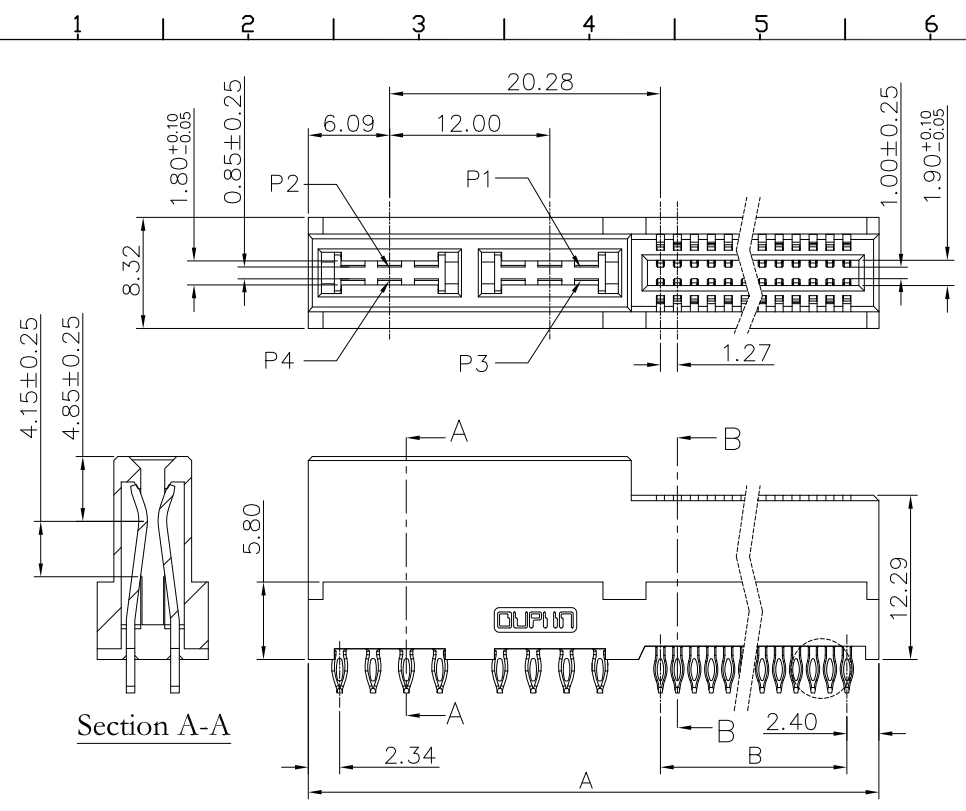

Section B-B

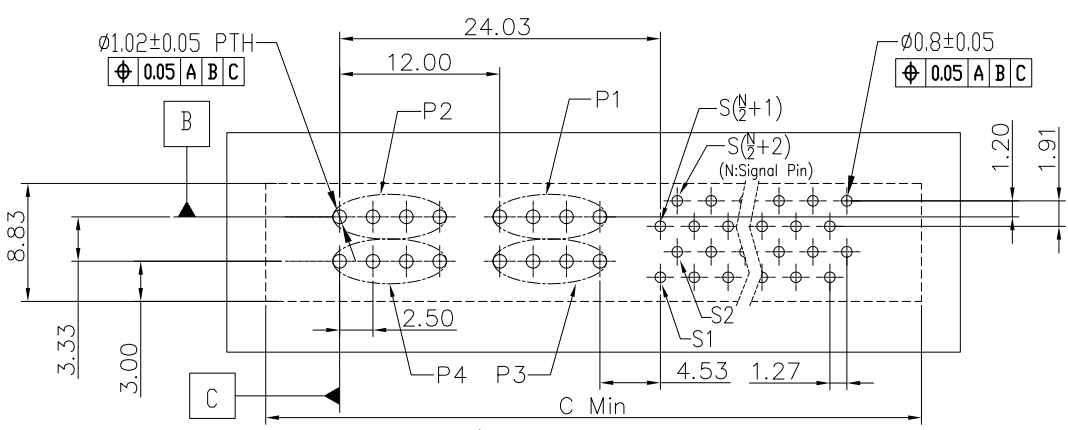

P.C.Board Layout
(Tolerance:±0.05)



- Series 9392 - 2 P04 Sxx N 1 1 CB 30 x A
- 2:Female Straight
 - P04:Power Contact
 - Sxx:Signal Pin
 - N: W/O Post.
 - 1: Without Guides
 - A:Tray Package
 - P:Press-Fit Type
 - D:Dip Type
 - 30: 30 u"
 - C:Selective Gold Plated
 - CB: Dip Tin Plated Contact
 - Au+Pd/Ni Plated
 - 1:DIM T=2.5mm

**Available Position			
Available Pos.	Dimension		
	A	B	C
P04S12	35.12	6.35	35.62
P04S16	37.66	8.89	38.16
P04S20	40.20	11.43	40.70
* P04S24	42.74	13.97	43.24
P04S28	45.28	16.51	45.78
P04S32	47.82	19.05	48.32
P04S36	50.36	21.59	50.86
P04S40	52.90	24.13	53.40

Tolerances	Dwg. No.	9392-D0000-004	Title:		9392 Series Low Profile Hybrid Power Receptacle				
x = ±0.5	Projection					OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
.x = ±0.25	Unit	mm	Scale	1:1		P/N: 9392-2P04SxxN11CB30xA			
.xx = ±0.15	Drawn By	GYJ 06/26'26				SHEET 1/2 Ver. No. R15			

