
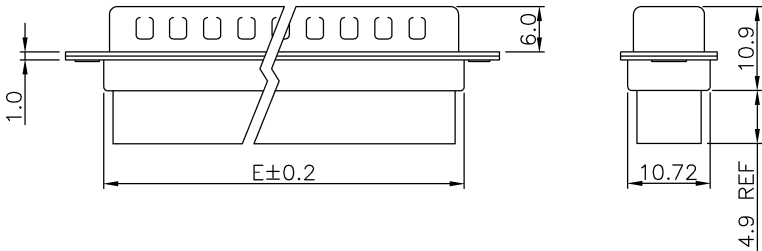




REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Shell: Steel.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

Male

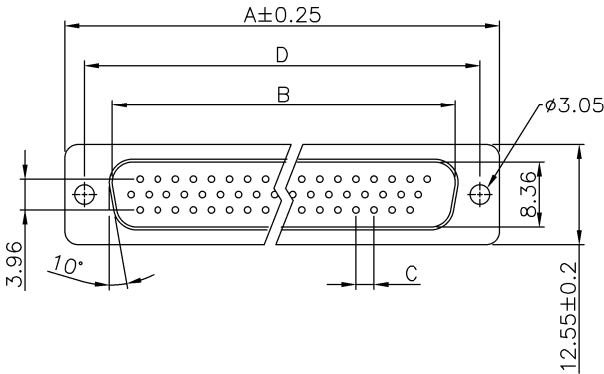

Female

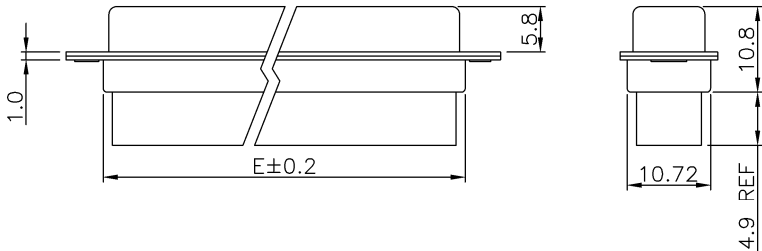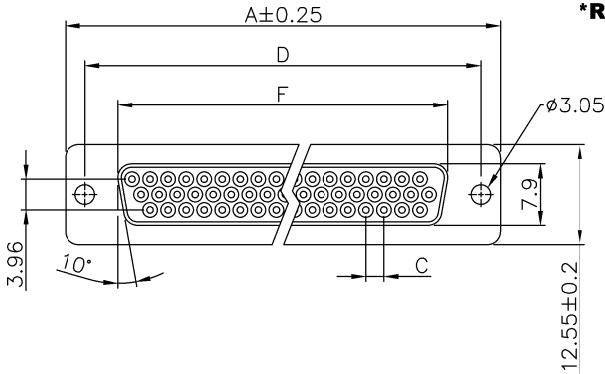

7918-xx M T B A
Series xx M T B A
Position M: Male F: Female A: Tray Package B: Black

Position	Dimension					
	A	B	C	D	E	F
15	30.81	16.92	2.29	24.99	19.3	16.33
26	39.14	25.25	2.29	33.32	27.5	24.66
44	53.04	38.96	2.29	47.04	41.3	38.38
62	69.32	55.42	2.41	63.50	57.7	54.84

Tolerances	Dwg. No.	7918D03001		Title:	7918 Series H.D. D-SUB Crimp Type						
x = ±0.5	Projection					OUPIN ELECTRONIC(KUNSHAN) CO., LTD.					
.x = ±0.25	Unit	mm	Scale			1:1	P/N: 7918-xxMTBA&7918-xxFTBA				
.xx = ±0.15	Drawn By	Martin 07/17'26				SHEET				1/1	Ver.No.
				Φ767							