
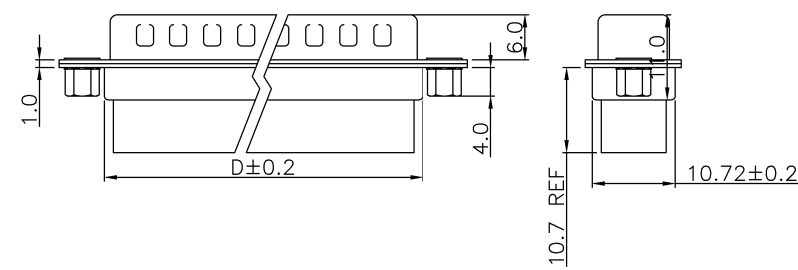




REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing:PBT, UL94V-0.
Shell: Steel.
Recommend Wire: 24AWG to 28AWG.
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulation Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 20m Ω max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

Male

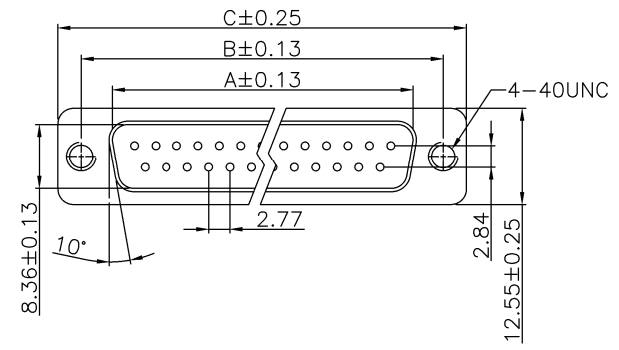

Female

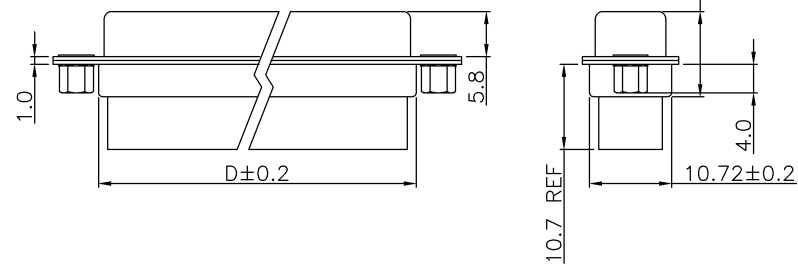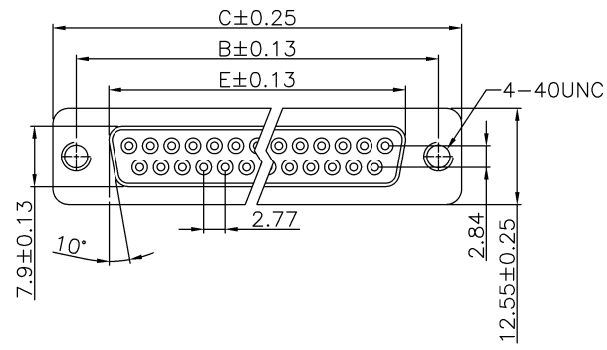

7908- xx x T N2 A
Series ———
Position ———
A: Tray Package
With NUTS 4-40UNC Threaded
Riveted On Rear Side
M: Male
F: Female

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.40	54.84

Tolerances	Dwg. No.	7908D03003	
x = ± 0.50	Projection	$\oplus$	$\ominus$
.x = ± 0.25	Unit	mm	Scale 1:1
.xx = ± 0.15	Drawn By	Martin 07/27'26	

Title:
7908 Series
D-SUB Crimp Type
① 767

 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7908-xxxTN2A			
SHEET	1/1	Ver.No.	A2